



# Solutions for energy transition

2022 EDITION




# Solutions for energy transition

2022 EDITION



UNI EN-ISO 9001



UNI EN-ISO 14001

#### WARNINGS

The characteristics of the products contained in this catalogue are not binding for Cabur and can be changed, without prior notice, due to production requirements or to improve the products. Hence, please contact our technical-commercial network for any necessary confirmations or updates. You can find additional information about this and other Cabur products at our website [www.cabur.eu](http://www.cabur.eu)

### The Company

Founded in Italy in 1952, Cabur quickly conquered the role of leader amongst the national manufacturers of terminal blocks for electrical panels, always paying particular attention to the needs of installers and to cutting-edge technological solutions.

Today the company develops and manufactures a wide range of products for the electrotechnical and electronic industry which are renowned for their reliability even in extreme conditions of use.

The current production is the result of the many years of experience gained by Cabur as a partner of the main national bodies and companies, perfected through actions and collaborations abroad and includes:


- Connections for electrical panels
- Automation and control solutions
- Industrial marking systems
- Solutions for energy transition

The wide and diversified offer guarantees a level of flexibility and unique ability to find solutions tailored to specific needs, which enables us to respond to the most varied and complex installation needs.

Always oriented towards the improvement of its products, in recent years Cabur has responded to the Industry 4.0 project with the expansion of production facilities and important product innovations.

In pursuing a corporate culture based on Total Quality, Cabur has adopted the main European directives of the reference market and collaborates with the most prestigious national and foreign Institutes and Laboratories.

Its products are the result of qualitative choices of particular relevance in the field of raw materials used that, in addition to providing an ample guarantee of functionality and reliability over time, also work in full compliance with all the Norms, Regulations, Laws and applicable requirements, binding and self-adopted, with full satisfaction of all compliance obligations.

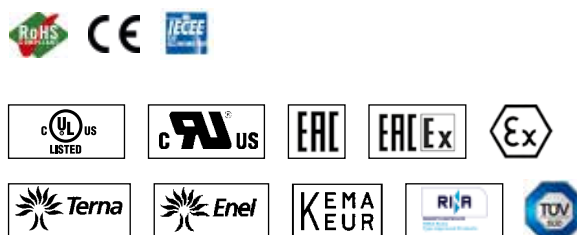

INDUSTRIAL CONNECTIVITY SOLUTIONS



AUTOMATION AND CONTROL SOLUTIONS



INDUSTRIAL MARKING SOLUTIONS



SOLUTIONS FOR ENERGY TRANSITION



## LINE 4 CABUR SOLAR CONNECTORS

|  |    |
|--|----|
| PANEL 4-6 mm <sup>2</sup> CONNECTORS ..... | 8  |
| FLY 4-6 mm <sup>2</sup> CONNECTORS.....    | 9  |
| FLY 10 mm <sup>2</sup> CONNECTORS .....    | 10 |
| Y CONNECTORS.....                          | 11 |
| FUSE HOLDER CONNECTOR.....                 | 12 |
| ACCESSORIES FOR CORRECT INSTALLATION.....  | 13 |

## PHOTOVOLTAIC STRINGBOXES

|   |    |
|---|----|
| DC/AC PHOTOVOLTAIC SINGLE PHASE STRINGBOXES - ISL SERIES .....        | 21 |
| DC/AC PHOTOVOLTAIC THREE PHASE STRINGBOXES - ISL SERIES.....          | 32 |
| AC PHOTOVOLTAIC SINGLE PHASE STRINGBOXES - ISS SERIES .....           | 37 |
| DC PHOTOVOLTAIC STRINGBOXES WITHOUT RELEASE COIL - ISB SERIES .....   | 38 |
| DC PHOTOVOLTAIC STRINGBOXES WITH RELEASE COIL - ISA SERIES.....       | 41 |
| DC PHOTOVOLTAIC STRINGBOXES WITH MONITORING CIRCUIT - ISM SERIES..... | 45 |

## SURGE PROTECTION DEVICES

|                                   |    |
|-----------------------------------|----|
| AC SURGE PROTECTION DEVICES.....  | 51 |
| DC SURGE PROTECTION DEVICES ..... | 53 |

## ACCESSORIES

|                                  |    |
|----------------------------------|----|
| DIODES .....                     | 56 |
| ACCESSORIES AND SPARE PARTS..... | 57 |





# Cabur Solar Connectors

A range of solutions suitable to implement safe and reliable connections.



La gamma comprende connettori volanti e da pannello certificati TÜV.

Cabur Solar "Line 4" connectors allow simple and effective connections.

The Line 4 connectors are composed by:

- Flying connectors, male and female
- Panel connectors, male and female
- Y connectors

All Cabur Solar "Line 4" connectors are supplied with caps and relative accessories.

In order to assure a connection compliance with standard, Cabur recommend use of pliers IS3161N.

The use of this tools is mandatory for guaranteed a excellent connection and the duration of the plant.

## FAST, SIMPLE, AND EFFECTIVE: CONNECTION IN JUST THREE STEPS


- 1 Insert the stripped wire into the contact to be crimped -CRIMP IT-.
- 2 Insert the wire complete with contact into the connector and push hard until you hear the typical CLICK which indicates that the plastic and metal parts are hooked together. Do not make any joints without checking that the plastic and metal parts are hooked together.
- 3 Screw on the wire gland washer manually until it is firmly homed to guarantee IP67.




## LINE 4 FLYING MALE - FEMALE CONNECTORS



**Fig. 1** - Exploded view of the panel connector body. The product is provided assembled.

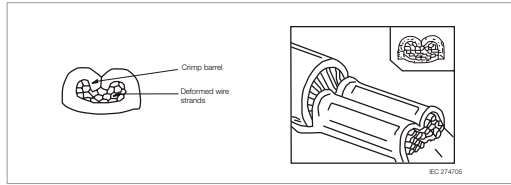

**Fig. 3** - Wire crimped onto PIN (inner view)

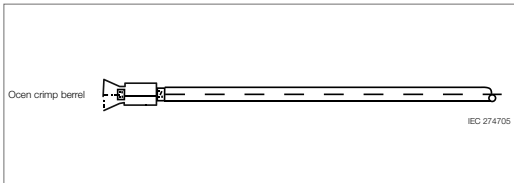

**Fig. 2** - Wire crimped onto PIN (top view)



**Fig. 4** - "Line 4" connector Pins

The fly connectors, both male and female, are made by four main parts:

- 1 **Metallic PIN**
- 2 **Rubber washer**
- 3 **Rigid PPO plastic washer**
- 4 **Main body made of PPO plastic**

- 1 **Pin** is a metallic contact made of tinned copper composed by two metallic wings allowing cable tightening via crimping action. The pin wings should be bending around the cable core. This action should be done with the appropriate Cabur Solar accessories.
- 2 **Rubber washer** is used to protect internal part of the connector, thus preventing penetration of external agents such as humidity, dust, and oils. This is achieved by pinching the electric wire insulating sleeve.

- 3 **PPO plastic washer** has a conical cavity that, after being screwed into the main body of the connector, forces the reeds together, compressing the rubber sheath into the wire insulation and hence acting to help ensure IP67 protection.
- 4 The **main body** holds the metallic PIN crimped onto the cable.

Connection from male and female connectors is made having the male metallic PIN paired with the female PIN, vice versa happens for the plastic shells.

Female connector has one red rubber ring which acts as insulating washer against the penetration of external atmospheric agents.

Male and female connectors are hooked together mechanically by means of two elastic wings on the female connector which must be inserted in the male connectors insulating body special slots.

## MALE-FEMALE PANEL CONNECTORS OF LINE 4



**Fig. 5** - Exploded view of the connector body. The product is provided assembled.

The connector are made by three parts:

- 1 **Metallic PIN**
- 2 **Rigid PPO hexagonal plastic washer**
- 3 **Main body made of PPO plastic**


- 1 **Metallic PIN** is similar to the one of the flying version.
- 2 **Hexagonal nut** allows locking the connector on panel surface. Pay attention to the strength used to block the connector as, if excessive, could damage the connector.
- 3 **Main body** made of PPO plastic is similar to the one of the flying version.



(1) IS14110N replace the code IS14110P.  
 (2) IS24111N replace the code IS24111P.

| VERSION | CODE TYPE | IS14110N    | IS24111N    |
|---------|-----------|-------------|-------------|
|         |           | KX04PM4060N | KX04PF4060N |

SCHEME

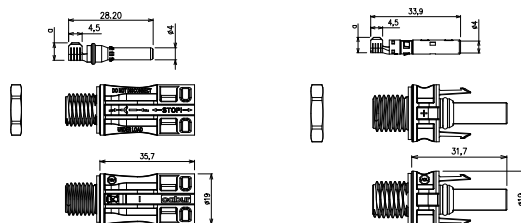

| TECHNICAL DATA              |                    |   |            |   |
|-----------------------------|--------------------|---|------------|---|
| Application                 |                    |   | Panel type | Panel type  |
| Connector type              |                    |   | Male       | Female  |
| Max. applicable voltage     | (Vdc)              | 1500  |            | 1500  |
| Max. applicable current     | (A)                | 35  |            | 35  |
| Cable section               | (mm <sup>2</sup> ) | 4-6   |            | 4-6   |
| PIN diameter                | (mm)               | 4   |            | 4   |
| Pliers to use               | Movable matrix     | UMCT3149  |            | UMCT3149  |
|                             | Fixed matrix       | IS3161N   |            | IS3161N   |
| Matrix to use               |                    | IS3154  |            | IS3154  |
| PIN material                |                    | Tinned Copper   |            | Tinned Copper   |
| Insulation material         |                    | PPE / PA  |            | PPE / PA  |
| Contact resistance          | Rc (mΩ)            | < 0.25  |            | < 0.25  |
| Nut Cap locking force       | (Nm)               | 0.8 - 1.0   |            | 0.8 - 1.0   |
| Operating temperature range | (°C)               | -40...+85   |            | -40...+85   |
| Protection degree           |                    | IP67  |            | IP67  |
| Flame class                 |                    | UL94-V0   |            | UL94-V0   |
| Packaging                   |                    | 100 (10 bag for every box, every single bag contains 10 plastic shell and 10 metallic PIN.) |            | 100 (10 bag for every box, every single bag contains 10 plastic shell and 10 metallic PIN.) |

APPROVALS



| ACCESSORIES                         |                           |        |            |            |
|-------------------------------------|---------------------------|--------|------------|------------|
| Open-end spanner and unlocking tool |                           |        | IS4SBLOCKN | IS4SBLOCKN |
|                                     | Quantity/package          | pieces | 2          | 2          |
| Caps                                | Male                      |        | IS52400N   | IS52400N   |
|                                     | Female                    |        | IS51400N   | IS51400N   |
|                                     | Working Temperature range |        | -40...+85  | -40...+85  |
|                                     | Protection degree         |        | IP67       | IP67       |
|                                     | Flame class               |        | UL94-V0    | UL94-V0    |
|                                     | Quantity/package          | pieces | 50         | 50         |
| SPARE COMPONENTS                    |                           |        |            |            |
| Plastic shell                       |                           |        | ISPAN4MN   | ISPAN4FN   |
|                                     | Quantity/package          | pieces | 100        | 100        |
| Metallic PIN wound on reel          |                           |        | IS0601207N | IS0601209N |
|                                     | Quantity/package          | pieces | 2000       | 2000       |




(1) IS14240N replace the code IS14240.  
(2) IS24241N replace the code IS24241.



| VERSION | CODE TYPE | IS14240N    | IS24241N    |
|---------|-----------|-------------|-------------|
|         |           | KX04VM4060N | KX04VF4060N |

SCHEME

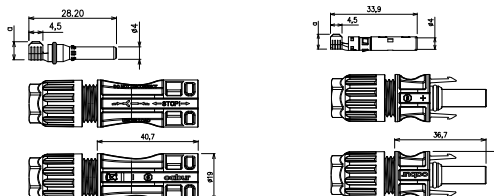

TECHNICAL DATA

|                             |                    |   |   |
|-----------------------------|--------------------|---|---|
| Application                 |                    | Cable type  | Cable type  |
| Connector type              |                    | Male  | Female  |
| Max. applicable voltage     | (Vdc)              | 1500  | 1500  |
| Max. applicable current     | (A)                | 35  | 35  |
| Cable section               | (mm <sup>2</sup> ) | 4-6   | 4-6   |
| PIN diameter                | (mm)               | 4   | 4   |
| Pliers to use               | Movable matrix     | UMCT3149  | UMCT3149  |
|                             | Fixed matrix       | IS3161N   | IS3161N   |
| Matrix to use               |                    | IS3154  | IS3154  |
| PIN material                |                    | Tinned Copper   | Tinned Copper   |
| Insulation material         |                    | PPE / PA  | PPE / PA  |
| Contact resistance          | Rc (mΩ)            | < 0.25  | < 0.25  |
| Nut Cap locking force       | (Nm)               | 1.5 - 1.8   | 1.5 - 1.8   |
| Operating temperature range | (°C)               | -40...+85   | -40...+85   |
| Protection degree           |                    | IP67  | IP67  |
| Flame class                 |                    | UL94-V0   | UL94-V0   |
| Packaging                   |                    | 100 (10 bag for every box, every single bag contains 10 plastic shell and 10 metallic PIN.) | 100 (10 bag for every box, every single bag contains 10 plastic shell and 10 metallic PIN.) |

APPROVALS



ACCESSORIES

|                                     |                           |            |            |
|-------------------------------------|---------------------------|------------|------------|
| Open-end spanner and unlocking tool |                           | IS4SBLOCKN | IS4SBLOCKN |
|                                     | Quantity/package pieces   | 2          | 2          |
| Caps                                | Male                      | IS52400N   | IS52400N   |
|                                     | Female                    | IS51400N   | IS51400N   |
|                                     | Working Temperature range | -40...+85  | -40...+85  |
|                                     | Protection degree         | IP67       | IP67       |
|                                     | Flame class               | UL94-V0    | UL94-V0    |
|                                     | Quantity/package pieces   | 50         | 50         |

SPARE COMPONENTS

|                            |                         |            |            |
|----------------------------|-------------------------|------------|------------|
| Plastic shell              |                         | ISVOL4MN   | ISVOL4FN   |
|                            | Quantity/package pieces | 100        | 100        |
| Metallic PIN wound on reel |                         | IS0601207N | IS0601209N |
|                            | Quantity/package pieces | 2000       | 2000       |



(1) IS14242N replace the code IS14242.  
(2) IS24243N replace the code IS24243.

| VERSION                             | CODE TYPE                 | IS14242N  | IS24243N  |
|-------------------------------------|---------------------------|---|---|
|                                     |                           | KX04VM100N  | KX04VF100N  |
|                                     |                           |   |   |
| SCHEME                              |                           |   |   |
| <b>TECHNICAL DATA</b>               |                           |   |   |
| Application                         |                           | Cable type  | Cable type  |
| Connector type                      |                           | Male  | Female  |
| Max. applicable voltage             | (Vdc)                     | 1500  | 1500  |
| Max. applicable current             | (A)                       | 60  | 60  |
| Cable section                       | (mm <sup>2</sup> )        | 10  | 10  |
| PIN diameter                        | (mm)                      | 4   | 4   |
| Pliers to use                       | Movable matrix            | IS3110N   | IS3110N   |
|                                     | Fixed matrix              | IS3110  | IS3110  |
| Matrix to use                       |                           | -   | -   |
| PIN material                        |                           | Tinned Copper   | Tinned Copper   |
| Insulation material                 |                           | PPE / PA  | PPE / PA  |
| Contact resistance                  | Rc (mΩ)                   | < 0.25  | < 0.25  |
| Nut Cap locking force               | (Nm)                      | 1.5 - 1.8   | 1.5 - 1.8   |
| Operating temperature range         | (°C)                      | -40...+85   | -40...+85   |
| Protection degree                   |                           | IP67  | IP67  |
| Flame class                         |                           | UL94-V0   | UL94-V0   |
| Packaging                           |                           | 100 [10 bag for every box, every single bag contains 10 plastic shell and 10 metallic PIN.] | 100 [10 bag for every box, every single bag contains 10 plastic shell and 10 metallic PIN.] |
| APPROVALS                           |                           |   |   |
| <b>ACCESSORIES</b>                  |                           |   |   |
| Open-end spanner and unlocking tool |                           | IS4SBLOCKN  | IS4SBLOCKN  |
|                                     | Quantity/package pieces   | 2   | 2   |
|                                     | Male                      | IS52400N  | IS52400N  |
|                                     | Female                    | IS51400N  | IS51400N  |
| Caps                                | Working Temperature range | -40...+85   | -40...+85   |
|                                     | Protection degree         | IP67  | IP67  |
|                                     | Flame class               | UL94-V0   | UL94-V0   |
|                                     | Quantity/package pieces   | 50  | 50  |
| <b>SPARE COMPONENTS</b>             |                           |   |   |
| Plastic shell                       |                           | -   | -   |
|                                     | Quantity/package pieces   | -   | -   |
| Metallic PIN wound on reel          |                           | -   | -   |
|                                     | Quantity/package pieces   | -   | -   |



(1) IS41410N replace the code IS41410.  
 (2) IS42420N replace the code IS42420.



| VERSION                             | CODE TYPE                 | IS41410N  | IS42420N  |
|-------------------------------------|---------------------------|---|---|
|                                     |                           | KX04MFFN  | KX04FMMN  |
| SCHEME                              |                           |   |   |
| <b>TECHNICAL DATA</b>               |                           |   |   |
| Application                         |                           | Y type  | Y type  |
| Connector type                      |                           | Male/ Female - Female   | Female / Male - Male  |
| Max. applicable voltage             | (Vdc)                     | 1500  | 1500  |
| Max. applicable current             | (A)                       | 60 (M) / 30 (F1) + 30 (F2)  | 60 (F) / 30 (M1) + 30 (M2)  |
| Cable section                       | (mm <sup>2</sup> )        | -   | -   |
| PIN diameter                        | (mm)                      | 4   | 4   |
| Pliers to use                       | Movable matrix            | -   | -   |
|                                     | Fixed matrix              | -   | -   |
| Matrix to use                       |                           | -   | -   |
| PIN material                        |                           | Tinned Copper   | Tinned Copper   |
| Insulation material                 |                           | PPE / PA  | PPE / PA  |
| Contact resistance                  | Rc (mΩ)                   | < 0.25  | < 0.25  |
| Nut Cap locking force               | (Nm)                      | -   | -   |
| Operating temperature range         | (°C)                      | -40...+85   | -40...+85   |
| Protection degree                   |                           | IP67  | IP67  |
| Flame class                         |                           | UL94-V0   | UL94-V0   |
| Packaging                           |                           | 30 (6 bag for every box, every single bag contains 5 Y connectors.) | 30 (6 bag for every box, every single bag contains 5 Y connectors.) |
| <b>APPROVALS</b>                    |                           |   |   |
|                                     |                           |   |   |
| <b>ACCESSORIES</b>                  |                           |   |   |
| Open-end spanner and unlocking tool |                           | IS4SBLOCKN  | IS4SBLOCKN  |
|                                     | Quantity/package pieces   | 2   | 2   |
|                                     | Male                      | IS52400N  | IS52400N  |
|                                     | Female                    | IS51400N  | IS51400N  |
| Caps                                | Working Temperature range | -40...+85   | -40...+85   |
|                                     | Protection degree         | IP67  | IP67  |
|                                     | Flame class               | UL94-V0   | UL94-V0   |
|                                     | Quantity/package pieces   | 50  | 50  |
| <b>SPARE COMPONENTS</b>             |                           |   |   |
| Plastic shell                       |                           | -   | -   |
|                                     | Quantity/package pieces   | -   | -   |
| Metallic PIN wound on reel          |                           | -   | -   |
|                                     | Quantity/package pieces   | -   | -   |




(1) IS43430N replace the code IS43430.  
 (2) Version produced upon request; contact our sales office for availability

LINE 4 CABUR SOLAR CONNECTORS

|                |             |                 |
|----------------|-------------|-----------------|
| <b>VERSION</b> | <b>CODE</b> | <b>IS43430N</b> |
|                | <b>TYPE</b> | <b>KX04FMHN</b> |

**SCHEME**



| TECHNICAL DATA              |  |                      |           |
|-----------------------------|--|----------------------|-----------|
| Application                 | Fuse holder  |                      |           |
| Connector type              | Male / Female  |                      |           |
| Max. applicable voltage     | (Vdc)  | 1500                 |           |
| Max. applicable current     | (A)  | 30 (see fuses table) |           |
| Cable section               | (mm <sup>2</sup> )   | -                    |           |
| PIN diameter                | (mm)   | 4                    |           |
| Pliers to use               | Movable matrix   | -                    |           |
|                             | Pliers to use  | -                    |           |
| Matrix to use               | -  |                      |           |
| PIN material                | Tinned Copper  |                      |           |
| Insulation material         | PPE / PA   |                      |           |
| Contact resistance          | Rc   | (mΩ)                 | < 0.25    |
| Nut Cap locking force       | (Nm)   |                      | -         |
| Operating temperature range | (°C)   |                      | -40...+85 |
| Protection degree           | IP67   |                      |           |
| Flame class                 | UL94-V0  |                      |           |
| Packaging                   | 50 (10 bags for every box, every single bag contains 5 connectors) |                      |           |

**APPROVALS**

| ACCESSORIES                         |                           |           |            |
|-------------------------------------|---------------------------|-----------|------------|
| Open-end spanner and unlocking tool |                           |           | IS4SBLOCKN |
|                                     | Quantity/package          | pieces    | 2          |
|                                     | Male                      | IS52400N  |            |
| Caps                                | Female                    | IS51400N  |            |
|                                     | Working Temperature range | -40...+85 |            |
|                                     | Protection degree         | IP67      |            |
|                                     | Flame class               | UL94-V0   |            |
|                                     | Quantity/package          | pieces    | 50         |

| SPARE COMPONENTS           |                  |        |   |
|----------------------------|------------------|--------|---|
| Plastic shell              | -                |        |   |
|                            | Quantity/package | pieces | - |
| Metallic PIN wound on reel | -                |        |   |
|                            | Quantity/package | pieces | - |



**Pliers with fixed or exchangeable inserts**  
**Suitable for Cabur Solar Connectors, ferrules,**  
**ring and spade**  
**Stripping pliers in pocket version for a rapid**  
**and easy operation**

To ensure the guarantee's effectiveness, the use of Cabur Solar tools, in conformance with the standards and instructions found in Cabur official documentation, is an essential requirement



| VERSION                   | CODE TYPE  | IS31579002                   | IS3170                              | IS3170 | KXCRI2506N | IS3161N   |
|---------------------------|--|------------------------------|-------------------------------------|--------|------------|---|
|                           |  | KXCSSLPE                     | IS3170                              |        |            |   |
| <b>Description</b>        |  | Cabur Solar stripping pliers | Pocket Cabur Solar stripping pliers |        |            | Cabur Solar crimping pliers with fixed insert for cable with max. section 6 mm <sup>2</sup> |
| <b>Quantity / Package</b> | pcs  | 1                            | 1                                   |        |            | 1   |
| <b>ACCESSORIES</b>        |  |                              |                                     |        |            |   |
| <b>Replacement blade</b>  |  | -                            | IS3170L                             |        |            | -   |
| <b>Insert</b>             | Line 4 Cabur Solar connector                               | -                            | -                                   |        |            | -   |
|                           | Ferrules for cable section 0.2 - 10 mm <sup>2</sup>        | -                            | -                                   |        |            | -   |
|                           | Ferrules for cable section 16 - 25 mm <sup>2</sup>         | -                            | -                                   |        |            | -   |
|                           | Ferrules for cable section 35 - 50 mm <sup>2</sup>         | -                            | -                                   |        |            | -   |
|                           | Ring and spade for cable section 1.5 - 2.5 mm <sup>2</sup> | -                            | -                                   |        |            | -   |
|                           | Ring and spade for cable section 4 - 6 mm <sup>2</sup>     | -                            | -                                   |        |            | -   |
| <b>Quantity / Package</b> | pcs  | 1                            | 1                                   |        |            | 1   |



| VERSION                   | CODE TYPE  | IS3110N   | UMCT3149                                    | IS3110  |
|---------------------------|--|---|---|---|
|                           |  | KXCRI10N  | UMCT  | KXCRI10   |
| <b>Description</b>        |  | Cabur Solar crimping pliers with movable insert for 10 mm <sup>2</sup> connectors | Crimping pliers with interchangeable insert | Cabur Solar crimping pliers with fixed insert for 10 mm <sup>2</sup> connectors |
| <b>Quantity / Package</b> | pcs  | 1   | 1   | 1   |
| <b>ACCESSORIES</b>        |  |   |   |   |
| <b>Replacement blade</b>  |  | -   | -   | -   |
| <b>Insert</b>             | Line 4 Cabur Solar connector                               | -   | IS3154                                      | -   |
|                           | Ferrules for cable section 0.2 - 10 mm <sup>2</sup>        | -   | UMCT3127                                    | -   |
|                           | Ferrules for cable section 16 - 25 mm <sup>2</sup>         | -   | UMCT3153                                    | -   |
|                           | Ferrules for cable section 35 - 50 mm <sup>2</sup>         | -   | UMCT3154                                    | -   |
|                           | Ring and spade for cable section 1.5 - 2.5 mm <sup>2</sup> | -   | UMCT3129                                    | -   |
|                           | Ring and spade for cable section 4 - 6 mm <sup>2</sup>     | -   | UMCT3128                                    | -   |
| <b>Quantity / Package</b> | pcs  | 1   | 1   | 1   |

## HOW TO STRIP WIRE USING IS31579002



- 1 The wire stripper works like a guillotine, suitable for wires of various thicknesses, allowing for fast and safe stripping.
- 2 It acts simultaneously on both the sleeves of the photovoltaic wire, cutting them precisely.
- 3 The blades move parallel to the wire, expelling the sheared off sleeve.

## STRIPPING WITH IS3170



This wire stripper is able to strip wires with sections of 2.5, 4, 6 and 10 mm<sup>2</sup>. It is fitted with an end stop and allows for a stripped constant length of approx. 8 mm, compliant with the requirements of our PINS. The blade can be replaced.

- To strip wires with a 2.5 mm<sup>2</sup> section, the blade must make a complete turn around the external perimeter of the wire.

- To strip wires with a 4 mm<sup>2</sup> section, the blade must make two complete turns around the external perimeter of the wire.
- To strip wires with a 6 mm<sup>2</sup> section, the blade must make three complete turns around the external perimeter of the wire.

In order to preserve the number of strands, the blade should not be turned more times than those indicated in the recommendations above for each wire section.

## HOW TO CRIMP



Example of use of the IS3161N crimper for Cabur Solar connectors.

## HOW TO CHANGE THE UMCT CRIMPER MATRIX



(fig.1)

(fig.2)

(fig.3)



(fig.4)

(fig.5)


(fig.6)

- Open the pliers as wide as possible (fig. 1);
- slowly bring the two levers of the pliers together, until the locking/release mechanism makes three clicks (fig. 2);
- observe the anchorage pin on the matrix (fig. 2);
- insert the matrix, moving the anchorage pin towards the internal part of the pliers chamber (fig.3);
- make sure that the plastic tooth has locked the matrix in place or that it has risen (fig.4);
- press the two levers of the pliers, closing them as tightly as possible (fig.4);
- release the handles; the pliers should open automatically and completely (fig.5);
- if, when the pliers are closing, you realise that the crimping is not successful or the crimp tool is blocked for any reason, it can be released by pressing and releasing the handles a few times and simultaneously pressing with your thumb on the release lever on the internal part of the handle (fig.6).

Blank lined area for notes.

# String Boxes, Control Units and related Components

To connect strings, distribute power and monitor installation performances in small, medium and large size photovoltaic systems.

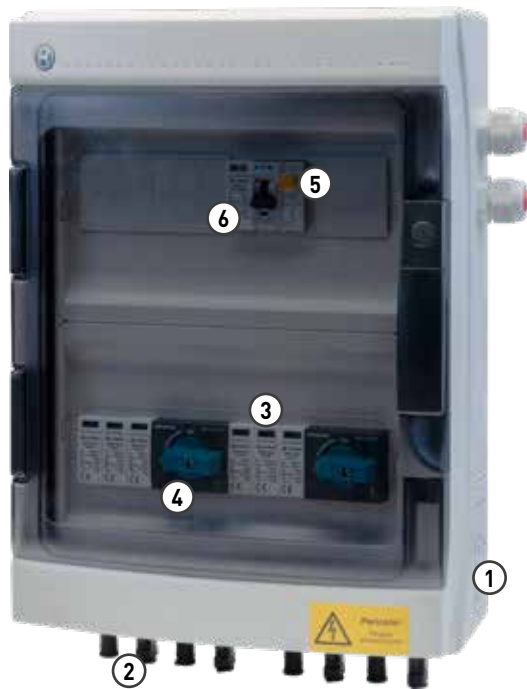

### Advantages of the StringBox series

- 1 Fast installation: components are already wired, able to connect using extractable connectors
- 2 Standardised product, in conformance with the regulations in effect: ideal to minimize design and inspection times and costs
- 3 Quality components in conformance with the regulations in effect
- 4 Large product range able to satisfy a wide range of needs
- 5 Box assembly completed and inspected by qualified personnel

### Custom:

Cabur is able to design string box on demand in compliance with the standard. For information, please contact our sales network.

The choice of a particular type of stringboxes is left to the customer. This choice depends on the configuration of the plant, the inverter type and the power of the photovoltaic systems.


Cabur Photovoltaic Stringboxes are composed by the following main parts:

- 1 Enclosure with solid and elegant design.  
It is suitable for external and internal ambient installations thanks to the IP65 degree protection.
- 2 "Line 4" panel connectors that allow a fast and secure connection. These are equipped with caps to ensure a 65 degree protection.
- 3 Surge protection devices: 20kA (8/20), available in 600Vdc or 1000Vdc version to match voltage effectively generated by the system.
- 4 DC circuit breaker with 600Vdc or 1000Vdc nominal voltage. It's ideal for protection and isolation for maintenance of solar strings in total safety. With handle and padlock.
- 5 Thermal magnetic circuit breaker with RCCB, single phase and three phase, A or AC class, with 300mA sensibility and interruption power of 6kA or 10kA.
- 6 AC SPD of 20kA, available on single phase and three phase version.


Every cabur photovoltaic electrical panel is provided together with all the documentation necessary to certify the photovoltaic system:

- **The installation manual** with the risk assessment document, in compliance with CEI EN 61439-2. This document contains all information about possible risks during the installation and maintenance.
- **Electrical and front panel scheme**, to be used during the installation to check the polarity of the connectors, the single-phase connections or the release coil.


The declaration of conformity of the photovoltaic electrical panel can be provided on demand.

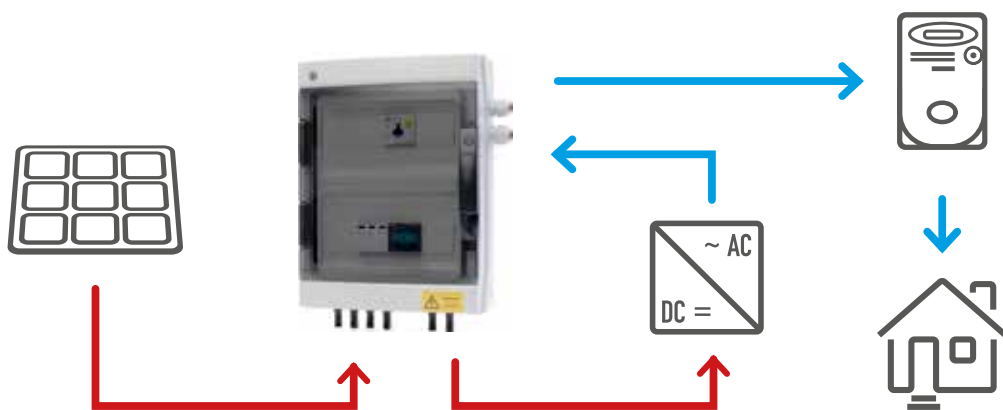

ISL LINE

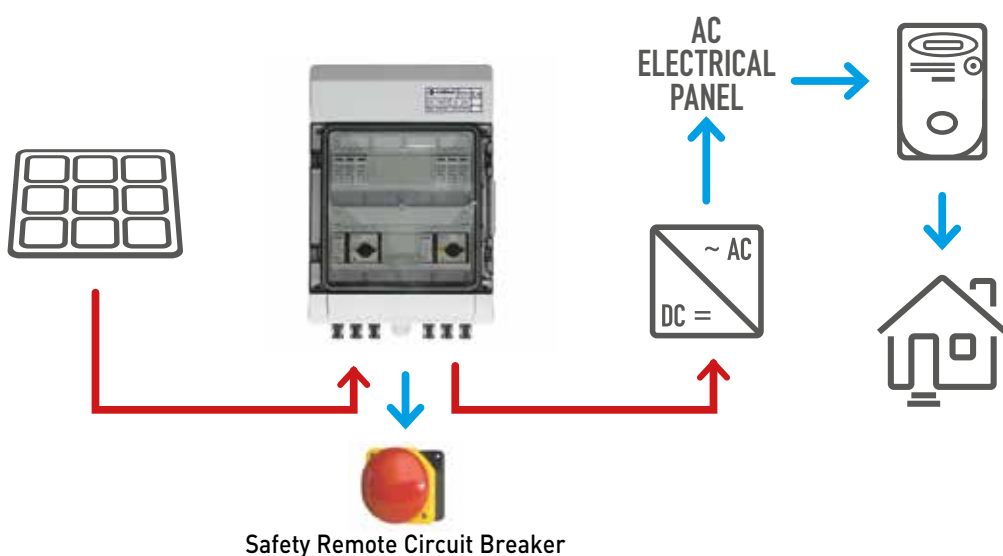

ISA LINE

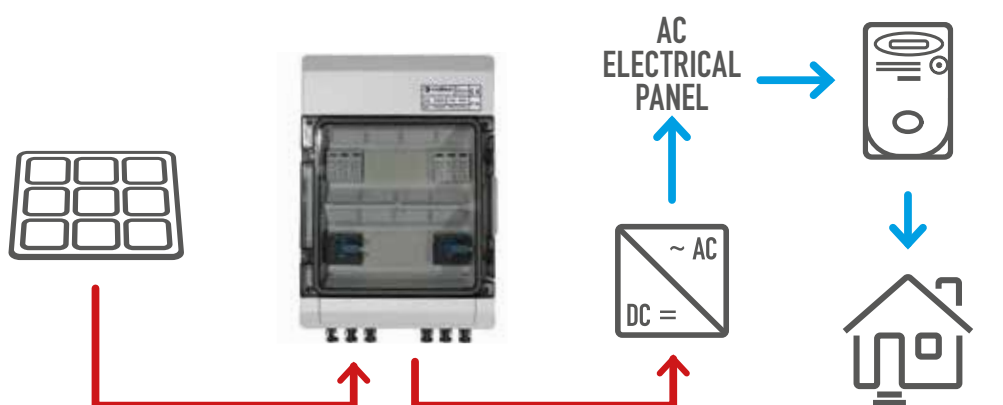

ISB LINE

# PHOTOVOLTAIC STRINGBOXES



| LINE | DC  |                 |              |              |               |             |                      |                                   |                                    | AC          |     |      |                          |                      |                |                       | CODE | PAGE           |            |
|------|-----|-----------------|--------------|--------------|---------------|-------------|----------------------|-----------------------------------|------------------------------------|-------------|-----|------|--------------------------|----------------------|----------------|-----------------------|------|----------------|------------|
|      | SPD | CIRCUIT BREAKER | FUSE HOLDERS | RELEASE COIL | INPUT STRINGS | OUTPUT MPPT | STRING VOLTAGE (Vdc) | MAX. CURRENT FOR SINGLE INPUT (A) | MAX. CURRENT FOR SINGLE OUTPUT (A) | SCARICATORE | MCB | RCCB | MAX. INPUT VOLTAGE (Vac) | MCB MAX. CURRENT (A) | MCB TRIP CURVE | RCCB SENSIBILITY (mA) |      |                | RCCB CLASS |
| ISL  | X   | X               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | X    | 230                      | 16                   | C              | 300                   | A    | ISL0101CA06    | 21         |
| ISL  | X   | X               | -            | -            | 1             | 1           | 1000                 | 20                                | 20                                 | X           | X   | X    | 230                      | 16                   | C              | 300                   | A    | ISL0101CA10    | 21         |
| ISL  | X   | X               | -            | -            | 2             | 1           | 600                  | 10                                | 20                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL0201CA06    | 22         |
| ISL  | X   | X               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL0201CA10    | 22         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL0202CA06    | 22         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 1000                 | 10                                | 10                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL0202CA10    | 23         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL0202CX06    | 24         |
| ISL  | X   | X               | -            | -            | 1             | 1           | 1000                 | 20                                | 20                                 | X           | X   | X    | 230                      | 25                   | C              | 300                   | A    | ISL11MSNA03251 | 24         |
| ISL  | X   | X               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | X    | 230                      | 20                   | C              | 300                   | AC   | ISL11MSNC03206 | 25         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | X    | 230                      | 25                   | C              | 300                   | AC   | ISL22MSNC03256 | 25         |
| ISL  | X   | X               | X            | -            | 1             | 1           | 600                  | 10                                | 10                                 | X           | X   | X    | 230                      | 20                   | C              | 300                   | AC   | ISL11MSSC03206 | 26         |
| ISL  | X   | X               | X            | -            | 2             | 2           | 1000                 | 10                                | 10                                 | X           | X   | X    | 230                      | 25                   | C              | 300                   | AC   | ISL22MSSC03251 | 26         |
| ISL  | X   | X               | X            | -            | 2             | 2           | 1000                 | 10                                | 10                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | AC   | ISL22MSSC03321 | 26         |
| ISL  | X   | X               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | -    | 230                      | 16                   | C              | -                     | -    | ISL0101MT06    | 27         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | -    | 230                      | 32                   | C              | -                     | -    | ISL0202MT06    | 27         |
| ISL  | X   | -               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | X    | 230                      | 16                   | C              | 300                   | A    | ISL0101NS06    | 28         |
| ISL  | X   | -               | -            | -            | 1             | 1           | 1000                 | 20                                | 20                                 | X           | X   | X    | 230                      | 16                   | C              | 300                   | A    | ISL11MNNA03161 | 28         |
| ISL  | X   | -               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | X    | 230                      | 20                   | C              | 300                   | AC   | ISL11MNNC03206 | 29         |
| ISL  | X   | -               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | X    | 230                      | 25                   | C              | 300                   | AC   | ISL11MNNC03256 | 29         |
| ISL  | X   | -               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL21MNNA03321 | 30         |
| ISL  | X   | -               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISL0202NS06    | 30         |
| ISL  | X   | -               | -            | -            | 1             | 1           | 600                  | 20                                | 20                                 | X           | X   | -    | 230                      | 16                   | C              | -                     | -    | ISL0101NSMT06  | 31         |
| ISL  | X   | -               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | -    | 230                      | 32                   | C              | -                     | -    | ISL0202NSMT06  | 31         |
| ISL  | X   | X               | -            | -            | 2             | 1           | 600                  | 10                                | 20                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T01CA06   | 32         |
| ISL  | X   | X               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T01CA10   | 32         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T02CA06   | 33         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 1000                 | 10                                | 10                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T02CA10   | 33         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 1000                 | 10                                | 10                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T02CX06   | 34         |
| ISL  | X   | X               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 400                      | 10                   | C              | 300                   | AC   | ISL21TSNC03101 | 34         |
| ISL  | X   | X               | -            | -            | 2             | 2           | 1000                 | 10                                | 10                                 | X           | X   | X    | 400                      | 20                   | C              | 300                   | AC   | ISL22TSNC03201 | 34         |
| ISL  | X   | -               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 400                      | 10                   | C              | 300                   | AC   | ISL21TNNC03101 | 35         |
| ISL  | X   | -               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 400                      | 20                   | C              | 300                   | AC   | ISL11TNNC03201 | 35         |
| ISL  | X   | -               | -            | -            | 2             | 1           | 1000                 | 10                                | 20                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T01NS10   | 36         |
| ISL  | X   | -               | -            | -            | 2             | 2           | 600                  | 10                                | 10                                 | X           | X   | X    | 400                      | 16                   | C              | 300                   | A    | ISL02T02NS06   | 36         |
| ISS  | -   | -               | -            | -            | -             | -           | -                    | -                                 | -                                  | X           | X   | X    | 230                      | 16                   | C              | 300                   | A    | ISS00MNNA03160 | 37         |
| ISS  | -   | -               | -            | -            | -             | -           | -                    | -                                 | -                                  | X           | X   | X    | 230                      | 32                   | C              | 300                   | A    | ISS00MNNA03320 | 37         |
| ISB  | X   | X               | -            | -            | 1             | 1           | 1000                 | 16                                | 16                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0101CA10    | 38         |
| ISB  | X   | X               | -            | -            | 2             | 1           | 600                  | 12,5                              | 25                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0201CA06    | 38         |
| ISB  | X   | X               | -            | -            | 2             | 1           | 1000                 | 12,5                              | 25                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0201CA10    | 38         |
| ISB  | X   | X               | -            | -            | 2             | 2           | 1000                 | 16                                | 16                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0202CA10    | 39         |
| ISB  | X   | X               | X            | -            | 4             | 1           | 600                  | 8                                 | 32                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0401CA06    | 39         |
| ISB  | X   | X               | X            | -            | 4             | 1           | 1000                 | 8                                 | 32                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0401CA10    | 39         |
| ISB  | X   | X               | -            | -            | 4             | 2           | 600                  | 12,5                              | 25                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0402CA06    | 40         |
| ISB  | X   | X               | -            | -            | 4             | 2           | 1000                 | 12,5                              | 25                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISB0402CA10    | 40         |
| ISA  | X   | X               | -            | X            | 2             | 1           | 600                  | 10                                | 20                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISA0201CA06    | 41         |
| ISA  | X   | X               | -            | X            | 2             | 1           | 1000                 | 10                                | 20                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISA0201CA10    | 41         |
| ISA  | X   | X               | -            | X            | 4             | 2           | 600                  | 12,5                              | 25                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISA0402CA06    | 42         |
| ISA  | X   | X               | -            | X            | 4             | 2           | 1000                 | 12,5                              | 25                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISA0402CA10    | 42         |
| ISA  | X   | X               | X            | X            | 8             | 1           | 1000                 | 10                                | 80                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISA0801CA10    | 43         |
| ISM  | X   | X               | X            | -            | 8             | 1           | 1000                 | 10                                | 80                                 | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISM0801CA10    | 45         |
| ISM  | X   | X               | X            | -            | 16            | 1           | 1000                 | 10                                | 160                                | -           | -   | -    | -                        | -                    | -              | -                     | -    | ISM1601CA10    | 45         |

MCB = MIGNATURE CIRCUIT BREAKER

RCCB = RESIDUAL CURRENT CIRCUIT BREAKER



- 1 DC inputs from the Photovoltaic field
- 1 DC outputs to the Photovoltaic inverters
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 MPPT management
- A-class Residual-Current Circuit Breaker
- 6 kA Thermal-Magnetic Circuit Breaker
- AC and DC surge protective device
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL0101CA06                      | ISL0101CA06 | ISL0101CA10                      | ISL0101CA10 |
|------------------------------------|-----------------------------------|----------------------------------|-------------|----------------------------------|-------------|
| <b>DC CIRCUIT</b>                  |                                   |                                  |             |                                  |             |
| Number of Input (solar strings)    |                                   | 1                                |             | 1                                |             |
| Number of Outputs MPPT             |                                   | 1                                |             | 1                                |             |
| Max. Input Voltage                 | (V)                               | 600                              |             | 1000                             |             |
| Max. Current for each string       | (A)                               | 20                               |             | 20                               |             |
| Max. MPPT output current           | (A)                               | 20                               |             | 20                               |             |
| With fuse holder                   |                                   | No                               |             | No                               |             |
| Circuit breaker                    |                                   | 1                                |             | 1                                |             |
| Surge protective device            | Nominal voltage Un                | (V)                              | 600         |                                  | 1000        |
|                                    | Protection level Up               | (V)                              | 2000        |                                  | 3000        |
|                                    | Nominal discharge current 8/20 In | (kA)                             | 20          |                                  | 20          |
| Input connection                   |                                   | Cabur Line 4 connectors          |             | Cabur Line 4 connectors          |             |
| Output connection                  |                                   | Cabur Line 4 connectors          |             | Cabur Line 4 connectors          |             |
| <b>AC CIRCUIT</b>                  |                                   |                                  |             |                                  |             |
| Max. input voltage                 | (V)                               | 230                              |             | 230                              |             |
| Max. input current                 | (A)                               | 16                               |             | 16                               |             |
| Nominal frequency                  | (Hz)                              | 50                               |             | 50                               |             |
| Thermal - magnetic circuit breaker | Type                              |                                  | 1P+N        |                                  | 1P+N        |
|                                    | Flow Rate                         | (A)                              | 16          |                                  | 16          |
|                                    | Tripping curve                    |                                  | C           |                                  | C           |
|                                    | Short circuit current             | (kA)                             | 6           |                                  | 6           |
| Residual-current circuit breaker   | Class                             |                                  | A           |                                  | A           |
|                                    | Sensitivity                       | (A)                              | 0.3         |                                  | 0.3         |
| Surge protective device            | Nominal voltage Un                | (V)                              | 230         |                                  | 230         |
|                                    | Protection level Up               | (V)                              | 1500        |                                  | 1500        |
|                                    | Nominal discharge current 8/20 In | (kA)                             | 20          |                                  | 20          |
| Input connection                   |                                   | 6 mm <sup>2</sup> terminal block |             | 6 mm <sup>2</sup> terminal block |             |
| Output connection                  |                                   | 6 mm <sup>2</sup> terminal block |             | 6 mm <sup>2</sup> terminal block |             |
| <b>GENERAL DATA</b>                |                                   |                                  |             |                                  |             |
| Protection Degree                  |                                   | IP65                             |             | IP65                             |             |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                      |             | 460x340x143                      |             |
| Standard compliancy                |                                   | CEI EN 61439-2                   |             | CEI EN 61439-2                   |             |

Up to 2 DC inputs from the Photovoltaic field  
 1 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 1 MPPT management  
 A-class Residual-Current Circuit Breaker  
 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL0201CA06                       | ISL0201CA06 | ISL0201CA10                       | ISL0201CA10 |
|------------------------------------|-----------------------------------|-----------------------------------|-------------|-----------------------------------|-------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |             |                                   |             |
| Number of Input (solar strings)    |                                   | 2                                 |             | 2                                 |             |
| Number of Outputs MPPT             |                                   | 1                                 |             | 1                                 |             |
| Max. Input Voltage                 | (V)                               | 600                               |             | 1000                              |             |
| Max. Current for each string       | (A)                               | 10                                |             | 10                                |             |
| Max. MPPT output current           | (A)                               | 20                                |             | 20                                |             |
| With fuse holder                   |                                   | No                                |             | No                                |             |
| Circuit breaker                    |                                   | 1                                 |             | 1                                 |             |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600         |                                   | 1000        |
|                                    | Protection level Up               | (V)                               | 2000        |                                   | 3000        |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          |                                   | 20          |
| Input connection                   |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |             |
| Output connection                  |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |             |
| <b>AC CIRCUIT</b>                  |                                   |                                   |             |                                   |             |
| Max. input voltage                 | (V)                               | 230                               |             | 230                               |             |
| Max. input current                 | (A)                               | 32                                |             | 32                                |             |
| Nominal frequency                  | (Hz)                              | 50                                |             | 50                                |             |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N        |                                   | 1P+N        |
|                                    | Flow Rate                         | (A)                               | 32          |                                   | 32          |
|                                    | Tripping curve                    |                                   | C           |                                   | C           |
|                                    | Short circuit current             | (kA)                              | 6           |                                   | 6           |
| Residual-current circuit breaker   | Class                             |                                   | A           |                                   | A           |
|                                    | Sensitivity                       | (A)                               | 0.3         |                                   | 0.3         |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230         |                                   | 230         |
|                                    | Protection level Up               | (V)                               | 1500        |                                   | 1500        |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          |                                   | 20          |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |             |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |             |
| <b>GENERAL DATA</b>                |                                   |                                   |             |                                   |             |
| Protection Degree                  |                                   | IP65                              |             | IP65                              |             |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |             | 460x340x143                       |             |
| Standard compliancy                |                                   | CEI EN 61439-2                    |             | CEI EN 61439-2                    |             |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 Up to 2 MPPT management  
 A-class Residual-Current Circuit Breaker  
 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL0202CA06                       | ISL0202CA06 | ISL0202CA10                       | ISL0202CA10 |
|------------------------------------|-----------------------------------|-----------------------------------|-------------|-----------------------------------|-------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |             |                                   |             |
| Number of Input (solar strings)    |                                   | 2                                 |             | 2                                 |             |
| Number of Outputs MPPT             |                                   | 2                                 |             | 2                                 |             |
| Max. Input Voltage                 | (V)                               | 600                               |             | 1000                              |             |
| Max. Current for each string       | (A)                               | 10                                |             | 10                                |             |
| Max. MPPT output current           | (A)                               | 10                                |             | 10                                |             |
| With fuse holder                   |                                   | No                                |             | No                                |             |
| Circuit breaker                    |                                   | 2                                 |             | 2                                 |             |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600         |                                   | 1000        |
|                                    | Protection level Up               | (V)                               | 2000        |                                   | 3000        |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          |                                   | 20          |
| Input connection                   |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |             |
| Output connection                  |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |             |
| <b>AC CIRCUIT</b>                  |                                   |                                   |             |                                   |             |
| Max. input voltage                 | (V)                               | 230                               |             | 230                               |             |
| Max. input current                 | (A)                               | 32                                |             | 32                                |             |
| Nominal frequency                  | (Hz)                              | 50                                |             | 50                                |             |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N        |                                   | 1P+N        |
|                                    | Flow Rate                         | (A)                               | 32          |                                   | 32          |
|                                    | Tripping curve                    |                                   | C           |                                   | C           |
|                                    | Short circuit current             | (kA)                              | 6           |                                   | 6           |
| Residual-current circuit breaker   | Class                             |                                   | A           |                                   | A           |
|                                    | Sensitivity                       | (A)                               | 0.3         |                                   | 0.3         |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230         |                                   | 230         |
|                                    | Protection level Up               | (V)                               | 1500        |                                   | 1500        |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          |                                   | 20          |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |             |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |             |
| <b>GENERAL DATA</b>                |                                   |                                   |             |                                   |             |
| Protection Degree                  |                                   | IP65                              |             | IP65                              |             |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |             | 460x340x143                       |             |
| Standard compliancy                |                                   | CEI EN 61439-2                    |             | CEI EN 61439-2                    |             |

- Up to 2 DC inputs from the Photovoltaic field
- Up to 2 DC outputs to the Photovoltaic inverters
- DC inputs/outputs based on Cabur Line 4 connectors
- Up to 2 MPPT management
- A-class Residual-Current Circuit Breaker
- 6 kA or 10 kA Thermal-Magnetic Circuit Breaker
- AC and DC surge protective device
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



[1] With only one circuit breaker you can disconnect at the same time the two DC circuits

| VERSION                            | CODE TYPE                         | ISL0202CX06                       | ISL0202CX06 | ISL11MSNA03251                    | ISL11MSNA03251 |
|------------------------------------|-----------------------------------|-----------------------------------|-------------|-----------------------------------|----------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |             |                                   |                |
| Number of Input (solar strings)    |                                   | 2                                 |             | 1                                 |                |
| Number of Outputs MPPT             |                                   | 2                                 |             | 1                                 |                |
| Max. Input Voltage                 | (V)                               | 600                               |             | 1000                              |                |
| Max. Current for each string       | (A)                               | 10                                |             | 20                                |                |
| Max. MPPT output current           | (A)                               | 10                                |             | 20                                |                |
| With fuse holder                   |                                   | No                                |             | No                                |                |
| Circuit breaker                    |                                   | 1 [1]                             |             | 1                                 |                |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600         | 1000                              |                |
|                                    | Protection level Up               | (V)                               | 2000        | 3000                              |                |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          | 20                                |                |
| Input connection                   |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |                |
| Output connection                  |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |                |
| <b>AC CIRCUIT</b>                  |                                   |                                   |             |                                   |                |
| Max. input voltage                 | (V)                               | 230                               |             | 230                               |                |
| Max. input current                 | (A)                               | 32                                |             | 25                                |                |
| Nominal frequency                  | (Hz)                              | 50                                |             | 50                                |                |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N        | 1P+N                              |                |
|                                    | Flow Rate                         | (A)                               | 32          | 25                                |                |
|                                    | Tripping curve                    |                                   | C           | C                                 |                |
|                                    | Short circuit current             | (kA)                              | 6           | 10                                |                |
| Residual-current circuit breaker   | Class                             |                                   | A           | A                                 |                |
|                                    | Sensitivity                       | (A)                               | 0.3         | 0.3                               |                |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230         | 230                               |                |
|                                    | Protection level Up               | (V)                               | 1500        | 1500                              |                |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          | 20                                |                |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |                |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |                |
| <b>GENERAL DATA</b>                |                                   |                                   |             |                                   |                |
| Protection Degree                  |                                   | IP65                              |             | IP65                              |                |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |             | 460x340x143                       |                |
| Standard compliancy                |                                   | CEI EN 61439-2                    |             | CEI EN 61439-2                    |                |

PHOTOVOLTAIC STRINGBOXES

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 Up to 2 MPPT management  
 AC-class Residual-Current Circuit Breaker  
 10 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL11MSNC03206                    | ISL22MSNC03256                    |      |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                                   |      |
| Number of Input (solar strings)    |                                   | 1                                 | 2                                 |      |
| Number of Outputs MPPT             |                                   | 1                                 | 2                                 |      |
| Max. Input Voltage                 | (V)                               | 600                               | 600                               |      |
| Max. Current for each string       | (A)                               | 20                                | 10                                |      |
| Max. MPPT output current           | (A)                               | 20                                | 10                                |      |
| With fuse holder                   |                                   | No                                | No                                |      |
| Circuit breaker                    |                                   | 1                                 | 2                                 |      |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600                               | 600  |
|                                    | Protection level Up               | (V)                               | 2000                              | 2000 |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20   |
| Input connection                   |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| Output connection                  |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                                   |      |
| Max. input voltage                 | (V)                               | 230                               | 230                               |      |
| Max. input current                 | (A)                               | 20                                | 25                                |      |
| Nominal frequency                  | (Hz)                              | 50                                | 50                                |      |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N                              |      |
|                                    | Flow Rate                         | (A)                               | 20                                | 25   |
|                                    | Tripping curve                    |                                   | C                                 | C    |
|                                    | Short circuit current             | (kA)                              | 10                                | 10   |
| Residual-current circuit breaker   | Class                             |                                   | AC                                |      |
|                                    | Sensitivity                       | (A)                               | 0.3                               | 0.3  |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230                               | 230  |
|                                    | Protection level Up               | (V)                               | 1500                              | 1500 |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20   |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| <b>GENERAL DATA</b>                |                                   |                                   |                                   |      |
| Protection Degree                  |                                   | IP65                              | IP65                              |      |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       | 460x340x143                       |      |
| Standard compliancy                |                                   | CEI EN 61439-2                    | CEI EN 61439-2                    |      |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 Up to 2 MPPT management  
 AC-class Residual-Current Circuit Breaker  
 10 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 With fuse holders  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY



| VERSION                            |                                   | CODE TYPE   | ISL11MSSC03206                    | ISL22MSSC03251                    | ISL22MSSC03321                    |
|------------------------------------|-----------------------------------|-------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <b>DC CIRCUIT</b>                  |                                   |             |                                   |                                   |                                   |
| Number of Input (solar strings)    |                                   |             | 1                                 | 2                                 | 2                                 |
| Number of Outputs MPPT             |                                   |             | 1                                 | 2                                 | 2                                 |
| Max. Input Voltage                 |                                   | (V)         | 600                               | 1000                              | 1000                              |
| Max. Current for each string       |                                   | (A)         | 10                                | 10                                | 10                                |
| Max. MPPT output current           |                                   | (A)         | 10                                | 10                                | 10                                |
| With fuse holder                   |                                   |             | Yes                               | Yes                               | Yes                               |
| Circuit breaker                    |                                   |             | 1                                 | 2                                 | 2                                 |
| Surge protective device            | Nominal voltage Un                | (V)         | 600                               | 1000                              | 1000                              |
|                                    | Protection level Up               | (V)         | 2000                              | 3000                              | 3000                              |
|                                    | Nominal discharge current 8/20 In | (kA)        | 20                                | 20                                | 20                                |
| Input connection                   |                                   |             | Cabur Line 4 connectors           | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| Output connection                  |                                   |             | Cabur Line 4 connectors           | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| <b>AC CIRCUIT</b>                  |                                   |             |                                   |                                   |                                   |
| Max. input voltage                 |                                   | (V)         | 230                               | 230                               | 230                               |
| Max. input current                 |                                   | (A)         | 20                                | 25                                | 32                                |
| Nominal frequency                  |                                   | (Hz)        | 50                                | 50                                | 50                                |
| Thermal - magnetic circuit breaker | Type                              |             | 1P+N                              | 1P+N                              | 1P+N                              |
|                                    | Flow Rate                         | (A)         | 20                                | 25                                | 32                                |
|                                    | Tripping curve                    |             | C                                 | C                                 | C                                 |
|                                    | Short circuit current             | (kA)        | 10                                | 10                                | 10                                |
| Residual-current circuit breaker   | Class                             |             | AC                                | AC                                | AC                                |
|                                    | Sensitivity                       | (A)         | 0.3                               | 0.3                               | 0.3                               |
| Surge protective device            | Nominal voltage Un                | (V)         | 230                               | 230                               | 230                               |
|                                    | Protection level Up               | (V)         | 1500                              | 1500                              | 1500                              |
|                                    | Nominal discharge current 8/20 In | (kA)        | 20                                | 20                                | 20                                |
| Input connection                   |                                   |             | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| Output connection                  |                                   |             | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| <b>GENERAL DATA</b>                |                                   |             |                                   |                                   |                                   |
| Protection Degree                  |                                   |             | IP65                              | IP65                              | IP65                              |
| Size (including connectors)        |                                   | (L x H x D) | 460x340x143                       | 520x462x143                       | 520x462x143                       |
| Standard compliancy                |                                   |             | CEI EN 61439-2                    | CEI EN 61439-2                    | CEI EN 61439-2                    |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 Up to 2 MPPT management  
 Without residual circuit breaker  
 10 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL0101MT06                       | ISL0101MT06 | ISL0202MT06                       | ISL0202MT06 |
|------------------------------------|-----------------------------------|-----------------------------------|-------------|-----------------------------------|-------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |             |                                   |             |
| Number of Input (solar strings)    |                                   | 1                                 |             | 2                                 |             |
| Number of Outputs MPPT             |                                   | 1                                 |             | 2                                 |             |
| Max. Input Voltage                 | (V)                               | 600                               |             | 600                               |             |
| Max. Current for each string       | (A)                               | 20                                |             | 10                                |             |
| Max. MPPT output current           | (A)                               | 20                                |             | 10                                |             |
| With fuse holder                   |                                   | No                                |             | No                                |             |
| Circuit breaker                    |                                   | 1                                 |             | 2                                 |             |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600         | 600                               |             |
|                                    | Protection level Up               | (V)                               | 2000        | 2000                              |             |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          | 20                                |             |
| Input connection                   |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |             |
| Output connection                  |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |             |
| <b>AC CIRCUIT</b>                  |                                   |                                   |             |                                   |             |
| Max. input voltage                 | (V)                               | 230                               |             | 230                               |             |
| Max. input current                 | (A)                               | 16                                |             | 32                                |             |
| Nominal frequency                  | (Hz)                              | 50                                |             | 50                                |             |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N        | 1P+N                              |             |
|                                    | Flow Rate                         | (A)                               | 16          | 32                                |             |
|                                    | Tripping curve                    |                                   | C           | C                                 |             |
|                                    | Short circuit current             | (kA)                              | 6           | 6                                 |             |
| Residual-current circuit breaker   | Class                             |                                   | -           | -                                 |             |
|                                    | Sensitivity                       | (A)                               | -           | -                                 |             |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230         | 230                               |             |
|                                    | Protection level Up               | (V)                               | 1500        | 1500                              |             |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          | 20                                |             |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |             |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |             |
| <b>GENERAL DATA</b>                |                                   |                                   |             |                                   |             |
| Protection Degree                  |                                   | IP65                              |             | IP65                              |             |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |             | 460x340x143                       |             |
| Standard compliancy                |                                   | CEI EN 61439-2                    |             | CEI EN 61439-2                    |             |

- Up to 2 DC inputs from the Photovoltaic field
- Up to 2 DC outputs to the Photovoltaic inverters
- DC inputs/outputs based on Cabur Line 4 connectors
- Up to 2 MPPT management
- Without DC circuit breaker
- A-class Residual-Current Circuit Breaker
- 6 kA Thermal-Magnetic Circuit Breaker
- AC and DC surge protective device
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL0101NS06                       | ISL0101NS06 | ISL11MNNA03161                    |
|------------------------------------|-----------------------------------|-----------------------------------|-------------|-----------------------------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |             |                                   |
| Number of Input (solar strings)    |                                   | 1                                 |             | 1                                 |
| Number of Outputs MPPT             |                                   | 1                                 |             | 1                                 |
| Max. Input Voltage                 | (V)                               | 600                               |             | 1000                              |
| Max. Current for each string       | (A)                               | 20                                |             | 20                                |
| Max. MPPT output current           | (A)                               | 20                                |             | 20                                |
| With fuse holder                   |                                   | No                                |             | No                                |
| Circuit breaker                    |                                   | 0                                 |             | 0                                 |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600         | 1000                              |
|                                    | Protection level Up               | (V)                               | 2000        | 3000                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          | 20                                |
| Input connection                   |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |
| Output connection                  |                                   | Cabur Line 4 connectors           |             | Cabur Line 4 connectors           |
| <b>AC CIRCUIT</b>                  |                                   |                                   |             |                                   |
| Max. input voltage                 | (V)                               | 230                               |             | 230                               |
| Max. input current                 | (A)                               | 16                                |             | 16                                |
| Nominal frequency                  | (Hz)                              | 50                                |             | 50                                |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N        | 1P+N                              |
|                                    | Flow Rate                         | (A)                               | 16          | 16                                |
|                                    | Tripping curve                    |                                   | C           | C                                 |
|                                    | Short circuit current             | (kA)                              | 6           | 6                                 |
| Residual-current circuit breaker   | Class                             |                                   | A           | A                                 |
|                                    | Sensitivity                       | (A)                               | 0.3         | 0.3                               |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230         | 230                               |
|                                    | Protection level Up               | (V)                               | 1500        | 1500                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20          | 20                                |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |             | 10 mm <sup>2</sup> terminal block |
| <b>GENERAL DATA</b>                |                                   |                                   |             |                                   |
| Protection Degree                  |                                   | IP65                              |             | IP65                              |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |             | 460x340x143                       |
| Standard compliancy                |                                   | CEI EN 61439-2                    |             | CEI EN 61439-2                    |

PHOTOVOLTAIC STRINGBOXES



- 1 DC inputs from the Photovoltaic field
- 1 DC outputs to the Photovoltaic inverters
- DC inputs/outputs based on Cabur Line 4 connectors
- Up to 1 MPPT management
- Without DC circuit breaker
- AC-class Residual-Current Circuit Breaker
- 10 kA Thermal-Magnetic Circuit Breaker
- AC and DC surge protective device
- Suitable for 600V systems
- CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL11MNNC03206                    | ISL11MNNC03256                    |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                                   |
| Number of Input (solar strings)    |                                   | 1                                 | 1                                 |
| Number of Outputs MPPT             |                                   | 1                                 | 1                                 |
| Max. Input Voltage                 | (V)                               | 600                               | 600                               |
| Max. Current for each string       | (A)                               | 20                                | 20                                |
| Max. MPPT output current           | (A)                               | 20                                | 20                                |
| With fuse holder                   |                                   | No                                | No                                |
| Circuit breaker                    |                                   | 0                                 | 0                                 |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600                               |
|                                    | Protection level Up               | (V)                               | 2000                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                |
| Input connection                   |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| Output connection                  |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                                   |
| Max. input voltage                 | (V)                               | 230                               | 230                               |
| Max. input current                 | (A)                               | 20                                | 25                                |
| Nominal frequency                  | (Hz)                              | 50                                | 50                                |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N                              |
|                                    | Flow Rate                         | (A)                               | 20                                |
|                                    | Tripping curve                    |                                   | C                                 |
|                                    | Short circuit current             | (kA)                              | 10                                |
| Residual-current circuit breaker   | Class                             |                                   | AC                                |
|                                    | Sensitivity                       | (A)                               | 0.3                               |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230                               |
|                                    | Protection level Up               | (V)                               | 1500                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| <b>GENERAL DATA</b>                |                                   |                                   |                                   |
| Protection Degree                  |                                   | IP65                              | IP65                              |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       | 460x340x143                       |
| Standard compliancy                |                                   | CEI EN 61439-2                    | CEI EN 61439-2                    |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 Up to 2 MPPT management  
 Without DC circuit breaker  
 AC or A-class Residual-Current Circuit Breaker  
 10 kA or 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL21MNNA03321                    | ISL21MNNA03321 | ISL0202NS06                       | ISL0202NS06 |
|------------------------------------|-----------------------------------|-----------------------------------|----------------|-----------------------------------|-------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                |                                   |             |
| Number of Input (solar strings)    |                                   | 2                                 |                | 2                                 |             |
| Number of Outputs MPPT             |                                   | 1                                 |                | 2                                 |             |
| Max. Input Voltage                 | (V)                               | 1000                              |                | 600                               |             |
| Max. Current for each string       | (A)                               | 10                                |                | 10                                |             |
| Max. MPPT output current           | (A)                               | 20                                |                | 10                                |             |
| With fuse holder                   |                                   | No                                |                | No                                |             |
| Circuit breaker                    |                                   | 0                                 |                | 0                                 |             |
| Surge protective device            | Nominal voltage Un                | (V)                               | 1000           | 600                               |             |
|                                    | Protection level Up               | (V)                               | 3000           | 2000                              |             |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20             | 20                                |             |
| Input connection                   |                                   | Cabur Line 4 connectors           |                | Cabur Line 4 connectors           |             |
| Output connection                  |                                   | Cabur Line 4 connectors           |                | Cabur Line 4 connectors           |             |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                |                                   |             |
| Max. input voltage                 | (V)                               | 230                               |                | 230                               |             |
| Max. input current                 | (A)                               | 32                                |                | 32                                |             |
| Nominal frequency                  | (Hz)                              | 50                                |                | 50                                |             |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N           | 1P+N                              |             |
|                                    | Flow Rate                         | (A)                               | 32             | 32                                |             |
|                                    | Tripping curve                    |                                   | C              | C                                 |             |
|                                    | Short circuit current             | (kA)                              | 10             | 6                                 |             |
| Residual-current circuit breaker   | Class                             |                                   | A              | A                                 |             |
|                                    | Sensitivity                       | (A)                               | 0.3            | 0.3                               |             |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230            | 230                               |             |
|                                    | Protection level Up               | (V)                               | 1500           | 1500                              |             |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20             | 20                                |             |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |                | 10 mm <sup>2</sup> terminal block |             |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |                | 10 mm <sup>2</sup> terminal block |             |
| <b>GENERAL DATA</b>                |                                   |                                   |                |                                   |             |
| Protection Degree                  |                                   | IP65                              |                | IP65                              |             |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |                | 460x340x143                       |             |
| Standard compliancy                |                                   | CEI EN 61439-2                    |                | CEI EN 61439-2                    |             |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 Up to 2 MPPT management  
 Without DC circuit breaker  
 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V systems  
 CEI EN 61439-2 compliant  
 Conforms alla normativa CEI EN 61439-2



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL0101NSMT06                     | ISL0101NSMT06 | ISL0202NSMT06                     | ISL0202NSMT06 |
|------------------------------------|-----------------------------------|-----------------------------------|---------------|-----------------------------------|---------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |               |                                   |               |
| Number of Input (solar strings)    |                                   | 1                                 |               | 2                                 |               |
| Number of Outputs MPPT             |                                   | 1                                 |               | 2                                 |               |
| Max. Input Voltage                 | (V)                               | 600                               |               | 600                               |               |
| Max. Current for each string       | (A)                               | 20                                |               | 10                                |               |
| Max. MPPT output current           | (A)                               | 20                                |               | 10                                |               |
| With fuse holder                   |                                   | No                                |               | No                                |               |
| Circuit breaker                    |                                   | 0                                 |               | 0                                 |               |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600           | 600                               |               |
|                                    | Protection level Up               | (V)                               | 2000          | 2000                              |               |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20            | 20                                |               |
| Input connection                   |                                   | Cabur Line 4 connectors           |               | Cabur Line 4 connectors           |               |
| Output connection                  |                                   | Cabur Line 4 connectors           |               | Cabur Line 4 connectors           |               |
| <b>AC CIRCUIT</b>                  |                                   |                                   |               |                                   |               |
| Max. input voltage                 | (V)                               | 230                               |               | 230                               |               |
| Max. input current                 | (A)                               | 16                                |               | 32                                |               |
| Nominal frequency                  | (Hz)                              | 50                                |               | 50                                |               |
| Thermal - magnetic circuit breaker | Type                              |                                   | 1P+N          | 1P+N                              |               |
|                                    | Flow Rate                         | (A)                               | 16            | 32                                |               |
|                                    | Tripping curve                    |                                   | C             | C                                 |               |
|                                    | Short circuit current             | (kA)                              | 6             | 6                                 |               |
| Residual-current circuit breaker   | Class                             |                                   | -             | -                                 |               |
|                                    | Sensitivity                       | (A)                               | -             | -                                 |               |
| Surge protective device            | Nominal voltage Un                | (V)                               | 230           | 230                               |               |
|                                    | Protection level Up               | (V)                               | 1500          | 1500                              |               |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20            | 20                                |               |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block |               | 10 mm <sup>2</sup> terminal block |               |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block |               | 10 mm <sup>2</sup> terminal block |               |
| <b>GENERAL DATA</b>                |                                   |                                   |               |                                   |               |
| Protection Degree                  |                                   | IP65                              |               | IP65                              |               |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       |               | 460x340x143                       |               |
| Standard compliancy                |                                   | CEI EN 61439-2                    |               | CEI EN 61439-2                    |               |

Up to 2 DC inputs from the Photovoltaic field  
 1 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 1 or 2 MPPT management  
 A-class Residual-Current Circuit Breaker  
 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL02T01CA06                      | ISL02T01CA10                      |      |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                                   |      |
| Number of Input (solar strings)    |                                   | 2                                 | 2                                 |      |
| Number of Outputs MPPT             |                                   | 1                                 | 1                                 |      |
| Max. Input Voltage                 | (V)                               | 600                               | 1000                              |      |
| Max. Current for each string       | (A)                               | 10                                | 10                                |      |
| Max. MPPT output current           | (A)                               | 20                                | 20                                |      |
| With fuse holder                   |                                   | No                                | No                                |      |
| Circuit breaker                    |                                   | 1                                 | 1                                 |      |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600                               | 1000 |
|                                    | Protection level Up               | (V)                               | 2000                              | 3000 |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20   |
| Input connection                   |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| Output connection                  |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                                   |      |
| Max. input voltage                 | (V)                               | 440                               | 440                               |      |
| Max. input current                 | (A)                               | 16                                | 16                                |      |
| Nominal frequency                  | (Hz)                              | 50                                | 50                                |      |
| Thermal - magnetic circuit breaker | Type                              |                                   | 3P+N                              | 3P+N |
|                                    | Flow Rate                         | (A)                               | 16                                | 16   |
|                                    | Tripping curve                    |                                   | C                                 | C    |
|                                    | Short circuit current             | (kA)                              | 6                                 | 6    |
| Residual-current circuit breaker   | Class                             |                                   | A                                 | A    |
|                                    | Sensitivity                       | (A)                               | 0.3                               | 0.3  |
| Surge protective device            | Nominal voltage Un                | (V)                               | 440                               | 440  |
|                                    | Protection level Up               | (V)                               | 1500                              | 1500 |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20   |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| <b>GENERAL DATA</b>                |                                   |                                   |                                   |      |
| Protection Degree                  |                                   | IP65                              | IP65                              |      |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       | 460x340x143                       |      |
| Standard compliancy                |                                   | CEI EN 61439-2                    | CEI EN 61439-2                    |      |

- Up to 2 DC inputs from the Photovoltaic field
- Up to 2 DC outputs to the Photovoltaic inverters
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 or 2 MPPT management
- A-class Residual-Current Circuit Breaker
- 6 kA Thermal-Magnetic Circuit Breaker
- AC and DC surge protective device
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL02T02CA06                      | ISL02T02CA10                      |      |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                                   |      |
| Number of Input (solar strings)    |                                   | 2                                 | 2                                 |      |
| Number of Outputs MPPT             |                                   | 2                                 | 2                                 |      |
| Max. Input Voltage                 | (V)                               | 600                               | 1000                              |      |
| Max. Current for each string       | (A)                               | 20                                | 20                                |      |
| Max. MPPT output current           | (A)                               | 20                                | 20                                |      |
| With fuse holder                   |                                   | No                                | No                                |      |
| Circuit breaker                    |                                   | 2                                 | 2                                 |      |
| Surge protective device            | Nominal voltage Un                | (V)                               | 600                               | 1000 |
|                                    | Protection level Up               | (V)                               | 2000                              | 3000 |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20   |
| Input connection                   |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| Output connection                  |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                                   |      |
| Max. input voltage                 | (V)                               | 440                               | 440                               |      |
| Max. input current                 | (A)                               | 16                                | 16                                |      |
| Nominal frequency                  | (Hz)                              | 50                                | 50                                |      |
| Thermal - magnetic circuit breaker | Type                              |                                   | 3P+N                              |      |
|                                    | Flow Rate                         | (A)                               | 16                                | 16   |
|                                    | Tripping curve                    |                                   | C                                 | C    |
|                                    | Short circuit current             | (kA)                              | 6                                 | 6    |
| Residual-current circuit breaker   | Class                             |                                   | A                                 |      |
|                                    | Sensitivity                       | (A)                               | 0.3                               | 0.3  |
| Surge protective device            | Nominal voltage Un                | (V)                               | 440                               | 440  |
|                                    | Protection level Up               | (V)                               | 1500                              | 1500 |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20   |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| <b>GENERAL DATA</b>                |                                   |                                   |                                   |      |
| Protection Degree                  |                                   | IP65                              | IP65                              |      |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       | 460x340x143                       |      |
| Standard compliancy                |                                   | CEI EN 61439-2                    | CEI EN 61439-2                    |      |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 1 or 2 MPPT management  
 A-class Residual-Current Circuit Breaker  
 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY



[1] The two DC circuits are disconnected at the same time

| VERSION                            | CODE TYPE                         | ISL02T02CX06                      | ISL21TSNC03101                    | ISL22TSNC03201                    |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                                   |                                   |
| Number of Input (solar strings)    |                                   | 2                                 | 2                                 | 2                                 |
| Number of Outputs MPPT             |                                   | 2                                 | 1                                 | 2                                 |
| Max. Input Voltage                 | (V)                               | 1000                              | 1000                              | 1000                              |
| Max. Current for each string       | (A)                               | 10                                | 10                                | 10                                |
| Max. MPPT output current           | (A)                               | 10                                | 20                                | 10                                |
| With fuse holder                   |                                   | No                                | No                                | No                                |
| Circuit breaker                    |                                   | 1 [1]                             | 1                                 | 1                                 |
| Surge protective device            | Nominal voltage Un                | (V)                               | 1000                              | 1000                              |
|                                    | Protection level Up               | (V)                               | 3000                              | 3000                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20                                |
| Input connection                   |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| Output connection                  |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                                   |                                   |
| Max. input voltage                 | (V)                               | 440                               | 440                               | 440                               |
| Max. input current                 | (A)                               | 16                                | 10                                | 20                                |
| Nominal frequency                  | (Hz)                              | 50                                | 50                                | 50                                |
| Thermal - magnetic circuit breaker | Type                              |                                   | 3P+N                              | 3P+N                              |
|                                    | Flow Rate                         | (A)                               | 16                                | 10                                |
|                                    | Tripping curve                    |                                   | C                                 | C                                 |
|                                    | Short circuit current             | (kA)                              | 6                                 | 10                                |
| Residual-current circuit breaker   | Class                             |                                   | A                                 | AC                                |
|                                    | Sensitivity                       | (A)                               | 0.3                               | 0.3                               |
| Surge protective device            | Nominal voltage Un                | (V)                               | 440                               | 440                               |
|                                    | Protection level Up               | (V)                               | 1500                              | 1500                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                | 20                                |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| <b>GENERAL DATA</b>                |                                   |                                   |                                   |                                   |
| Protection Degree                  |                                   | IP65                              | IP65                              | IP65                              |
| Size (including connectors)        | (L x H x D)                       | 460x340x143                       | 520x462x143                       | 520x462x143                       |
| Standard compliancy                |                                   | CEI EN 61439-2                    | CEI EN 61439-2                    | CEI EN 61439-2                    |

Up to 2 DC inputs from the Photovoltaic field  
 1 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 1 or 2 MPPT management  
 Without DC circuit breaker  
 AC-class Residual-Current Circuit Breaker  
 10 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 1000V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISL21TNNC03101                    | ISL11TNNC03201                    |
|------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <b>DC CIRCUIT</b>                  |                                   |                                   |                                   |
| Number of Input (solar strings)    |                                   | 2                                 | 2                                 |
| Number of Outputs MPPT             |                                   | 1                                 | 1                                 |
| Max. Input Voltage                 | (V)                               | 1000                              | 1000                              |
| Max. Current for each string       | (A)                               | 10                                | 10                                |
| Max. MPPT output current           | (A)                               | 20                                | 20                                |
| With fuse holder                   |                                   | No                                | No                                |
| Circuit breaker                    |                                   | 0                                 | 0                                 |
| Surge protective device            | Nominal voltage Un                | (V)                               | 1000                              |
|                                    | Protection level Up               | (V)                               | 3000                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                |
| Input connection                   |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| Output connection                  |                                   | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| <b>AC CIRCUIT</b>                  |                                   |                                   |                                   |
| Max. input voltage                 | (V)                               | 440                               | 440                               |
| Max. input current                 | (A)                               | 10                                | 20                                |
| Nominal frequency                  | (Hz)                              | 50                                | 50                                |
| Thermal - magnetic circuit breaker | Type                              |                                   | 3P+N                              |
|                                    | Flow Rate                         | (A)                               | 10                                |
|                                    | Tripping curve                    |                                   | C                                 |
|                                    | Short circuit current             | (kA)                              | 10                                |
| Residual-current circuit breaker   | Class                             |                                   | AC                                |
|                                    | Sensitivity                       | (A)                               | 0.3                               |
| Surge protective device            | Nominal voltage Un                | (V)                               | 440                               |
|                                    | Protection level Up               | (V)                               | 1500                              |
|                                    | Nominal discharge current 8/20 In | (kA)                              | 20                                |
| Input connection                   |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| Output connection                  |                                   | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| <b>GENERAL DATA</b>                |                                   |                                   |                                   |
| Protection Degree                  |                                   | IP65                              | IP65                              |
| Size (including connectors)        | (L x H x D)                       | 520x462x143                       | 520x462x143                       |
| Standard compliancy                |                                   | CEI EN 61439-2                    | CEI EN 61439-2                    |

Up to 2 DC inputs from the Photovoltaic field  
 Up to 2 DC outputs to the Photovoltaic inverters  
 DC inputs/outputs based on Cabur Line 4 connectors  
 1 or 2 MPPT management  
 Without DC circuit breaker  
 A-class Residual-Current Circuit Breaker  
 6 kA Thermal-Magnetic Circuit Breaker  
 AC and DC surge protective device  
 Suitable for 600V or 1000V systems  
 CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            |                                   | CODE TYPE   | ISL02T01NS10                      | ISL02T02NS06                      |
|------------------------------------|-----------------------------------|-------------|-----------------------------------|-----------------------------------|
| <b>DC CIRCUIT</b>                  |                                   |             |                                   |                                   |
| Number of Input (solar strings)    |                                   |             | 2                                 | 2                                 |
| Number of Outputs MPPT             |                                   |             | 1                                 | 2                                 |
| Max. Input Voltage                 |                                   | (V)         | 1000                              | 600                               |
| Max. Current for each string       |                                   | (A)         | 10                                | 10                                |
| Max. MPPT output current           |                                   | (A)         | 20                                | 10                                |
| With fuse holder                   |                                   |             | No                                | No                                |
| Circuit breaker                    |                                   |             | 0                                 | 0                                 |
| Surge protective device            | Nominal voltage Un                | (V)         | 1000                              | 600                               |
|                                    | Protection level Up               | (V)         | 3000                              | 2000                              |
|                                    | Nominal discharge current 8/20 In | (kA)        | 20                                | 20                                |
| Input connection                   |                                   |             | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| Output connection                  |                                   |             | Cabur Line 4 connectors           | Cabur Line 4 connectors           |
| <b>AC CIRCUIT</b>                  |                                   |             |                                   |                                   |
| Max. input voltage                 |                                   | (V)         | 440                               | 440                               |
| Max. input current                 |                                   | (A)         | 16                                | 16                                |
| Nominal frequency                  |                                   | (Hz)        | 50                                | 50                                |
| Thermal - magnetic circuit breaker | Type                              |             | 3P+N                              | 3P+N                              |
|                                    | Flow Rate                         | (A)         | 16                                | 16                                |
|                                    | Tripping curve                    |             | C                                 | C                                 |
|                                    | Short circuit current             | (kA)        | 6                                 | 6                                 |
| Residual-current circuit breaker   | Class                             |             | A                                 | A                                 |
|                                    | Sensitivity                       | (A)         | 0.3                               | 0.3                               |
| Surge protective device            | Nominal voltage Un                | (V)         | 440                               | 440                               |
|                                    | Protection level Up               | (V)         | 1500                              | 1500                              |
|                                    | Nominal discharge current 8/20 In | (kA)        | 20                                | 20                                |
| Input connection                   |                                   |             | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| Output connection                  |                                   |             | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |
| <b>GENERAL DATA</b>                |                                   |             |                                   |                                   |
| Protection Degree                  |                                   |             | IP65                              | IP65                              |
| Size (including connectors)        |                                   | (L x H x D) | 460x340x143                       | 460x340x143                       |
| Standard compliancy                |                                   |             | CEI EN 61439-2                    | CEI EN 61439-2                    |

PHOTOVOLTAIC STRINGBOXES



A-class Residual-Current Circuit Breaker  
10 kA Thermal-Magnetic Circuit Breaker  
AC surge protective device  
CEI EN 61439-2 compliant



PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                            | CODE TYPE                         | ISS00MNNA03160            | ISS00MNNA03320            |      |
|------------------------------------|-----------------------------------|---------------------------|---------------------------|------|
| <b>AC CIRCUIT</b>                  |                                   |                           |                           |      |
| Max. input voltage                 | [V]                               | 230                       | 230                       |      |
| Max. input current                 | [A]                               | 16                        | 32                        |      |
| Nominal frequency                  |                                   | 50                        | 50                        |      |
| Thermal - magnetic circuit breaker | Type                              | 1P+N                      | 1P+N                      |      |
|                                    | Flow Rate                         | [A]                       | 16                        | 32   |
|                                    | Tripping curve                    |                           | C                         | C    |
|                                    | Short circuit current             | [kA]                      | 10                        | 10   |
| Residual-current circuit breaker   | Class                             |                           | A                         | A    |
|                                    | Sensitivity                       |                           | 0.3                       | 0.3  |
| Surge protective device            | Nominal voltage Un                | [V]                       | 230                       | 230  |
|                                    | Protection level Up               | [V]                       | 1500                      | 1500 |
|                                    | Nominal discharge current 8/20 In | [kA]                      | 20                        | 20   |
| Input connection                   |                                   | circuit breaker terminals | circuit breaker terminals |      |
| Output connection                  |                                   | circuit breaker terminals | circuit breaker terminals |      |
| <b>GENERAL DATA</b>                |                                   |                           |                           |      |
| Protection Degree                  |                                   | IP65                      | IP65                      |      |
| Size (including connectors)        | (mm)                              | 275x111x200               | 275x111x200               |      |
| Standard compliancy                |                                   | CEI EN 61439-2            | CEI EN 61439-2            |      |

- Up to 2 DC inputs from the Photovoltaic field
- 1 DC outputs to the Photovoltaic inverter
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 MPPT management
- DC surge protective device
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY



PHOTOVOLTAIC STRINGBOXES

| VERSION                         | CODE TYPE                         | ISB0101CA10             | ISB0201CA06    | ISB0201CA10             |      |
|---------------------------------|-----------------------------------|-------------------------|----------------|-------------------------|------|
| <b>DC CIRCUIT</b>               |                                   |                         |                |                         |      |
| Number of Input (solar strings) |                                   | 1                       | 2              | 2                       |      |
| Number of Outputs MPPT          |                                   | 1                       | 1              | 1                       |      |
| Max. Input Voltage              | (V)                               | 1000                    | 600            | 1000                    |      |
| Max. Current for each string    | (A)                               | 16                      | 12.5           | 12.5                    |      |
| Max. MPPT output current        | (A)                               | 16                      | 25             | 25                      |      |
| With fuse holder                |                                   | No                      | No             | No                      |      |
| Circuit breaker                 |                                   | 1                       | 1              | 1                       |      |
| Surge protective device         | Nominal voltage Un                | (V)                     | 1000           | 600                     | 1000 |
|                                 | Protection level Up               | (V)                     | 3000           | 2000                    | 3000 |
|                                 | Nominal discharge current 8/20 In | (kA)                    | 20             | 20                      | 20   |
| Input connection                |                                   | Cabur Line 4 connectors |                | Cabur Line 4 connectors |      |
| Output connection               |                                   | Cabur Line 4 connectors |                | Cabur Line 4 connectors |      |
| <b>GENERAL DATA</b>             |                                   |                         |                |                         |      |
| Protection Degree               |                                   | IP65                    | IP65           | IP65                    |      |
| Size (including connectors)     | (mm)                              | 275x200x111             | 275x200x111    | 275x200x111             |      |
| Standard compliancy             |                                   | CEI EN 61439-2          | CEI EN 61439-2 | CEI EN 61439-2          |      |

- Up to 4 DC inputs from the Photovoltaic field
- Up to 2 DC outputs to the Photovoltaic inverter
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 or 2 MPPT management
- DC surge protective device
- with fuse holders on positive circuit
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY

PRESENTATION PURPOSE ONLY



[1] Our stringbox are sell without fuses, the choice of the correct size of fuse is mandatory by the customers

| VERSION                         | CODE TYPE                         | ISB0202CA10             | ISB0401CA06                       | ISB0401CA10                       |      |
|---------------------------------|-----------------------------------|-------------------------|-----------------------------------|-----------------------------------|------|
| <b>DC CIRCUIT</b>               |                                   |                         |                                   |                                   |      |
| Number of Input (solar strings) |                                   | 2                       | 4                                 | 4                                 |      |
| Number of Outputs MPPT          |                                   | 2                       | 1                                 | 1                                 |      |
| Max. Input Voltage              | (V)                               | 1000                    | 600                               | 1000                              |      |
| Max. Current for each string    | (A)                               | 16                      | 8                                 | 8                                 |      |
| Max. MPPT output current        | (A)                               | 16                      | 32                                | 32                                |      |
| With fuse holder                |                                   | No                      | Yes (1)                           | Yes (1)                           |      |
| Circuit breaker                 |                                   | 1                       | 1                                 | 1                                 |      |
| Surge protective device         | Nominal voltage Un                | (V)                     | 1000                              | 600                               | 1000 |
|                                 | Protection level Up               | (V)                     | 3000                              | 2000                              | 3000 |
|                                 | Nominal discharge current 8/20 In | (kA)                    | 20                                | 20                                | 20   |
| Input connection                |                                   | Cabur Line 4 connectors | Cabur Line 4 connectors           | Cabur Line 4 connectors           |      |
| Output connection               |                                   | Cabur Line 4 connectors | 10 mm <sup>2</sup> terminal block | 10 mm <sup>2</sup> terminal block |      |
| <b>GENERAL DATA</b>             |                                   |                         |                                   |                                   |      |
| Protection Degree               |                                   | IP65                    | IP65                              | IP65                              |      |
| Size (including connectors)     | (mm)                              | 295x495x130             | 400x370x130                       | 400x370x130                       |      |
| Standard compliancy             |                                   | CEI EN 61439-2          | CEI EN 61439-2                    | CEI EN 61439-2                    |      |

- Up to 4 DC inputs from the Photovoltaic field
- Up to 2 DC outputs to the Photovoltaic inverter
- DC inputs/outputs based on Cabur Line 4 connectors
- 2 MPPT management
- DC surge protective device
- Suitable for 600V or 1000V systems
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                         | CODE TYPE                         | ISB0402CA06             | ISB0402CA06 | ISB0402CA10             | ISB0402CA10 |
|---------------------------------|-----------------------------------|-------------------------|-------------|-------------------------|-------------|
| <b>DC CIRCUIT</b>               |                                   |                         |             |                         |             |
| Number of Input (solar strings) |                                   | 4                       |             | 4                       |             |
| Number of Outputs MPPT          |                                   | 2                       |             | 2                       |             |
| Max. Input Voltage              | (V)                               | 600                     |             | 1000                    |             |
| Max. Current for each string    | (A)                               | 12.5                    |             | 12.5                    |             |
| Max. MPPT output current        | (A)                               | 25                      |             | 25                      |             |
| With fuse holder                |                                   | No                      |             | No                      |             |
| Circuit breaker                 |                                   | 2                       |             | 2                       |             |
| Surge protective device         | Nominal voltage Un                | (V)                     | 600         |                         | 1000        |
|                                 | Protection level Up               | (V)                     | 2000        |                         | 3000        |
|                                 | Nominal discharge current 8/20 In | (kA)                    | 20          |                         | 20          |
| Input connection                |                                   | Cabur Line 4 connectors |             | Cabur Line 4 connectors |             |
| Output connection               |                                   | Cabur Line 4 connectors |             | Cabur Line 4 connectors |             |
| <b>GENERAL DATA</b>             |                                   |                         |             |                         |             |
| Protection Degree               |                                   | IP65                    |             | IP65                    |             |
| Size (including connectors)     | (mm)                              | 295x495x130             |             | 295x495x130             |             |
| Standard compliancy             |                                   | CEI EN 61439-2          |             | CEI EN 61439-2          |             |

- Up to 2 DC inputs from the Photovoltaic field
- 1 DC outputs to the Photovoltaic inverter
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 MPPT management
- DC surge protective device
- Suitable for 600V or 1000V systems
- With 230Vac release coil
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                         | CODE TYPE                         | ISA0201CA06             | ISA0201CA10             |
|---------------------------------|-----------------------------------|-------------------------|-------------------------|
| <b>DC CIRCUIT</b>               |                                   |                         |                         |
| Number of Input (solar strings) |                                   | 2                       | 2                       |
| Number of Outputs MPPT          |                                   | 1                       | 1                       |
| Max. Input Voltage              | (V)                               | 600                     | 1000                    |
| Max. Current for each string    | (A)                               | 10                      | 10                      |
| Max. MPPT output current        | (A)                               | 20                      | 20                      |
| With fuse holder                |                                   | No                      | No                      |
| Circuit breaker                 |                                   | 1                       | 1                       |
| Surge protective device         | Nominal voltage Un                | (V) 600                 | 1000                    |
|                                 | Protection level Up               | (V) 2000                | 3000                    |
|                                 | Nominal discharge current 8/20 In | (kA) 20                 | 20                      |
| Input connection                |                                   | Cabur Line 4 connectors | Cabur Line 4 connectors |
| Output connection               |                                   | Cabur Line 4 connectors | Cabur Line 4 connectors |
| <b>GENERAL DATA</b>             |                                   |                         |                         |
| Protection Degree               |                                   | IP65                    | IP65                    |
| Size (including connectors)     | (mm)                              | 275x200x111             | 275x200x111             |
| Standard compliancy             |                                   | CEI EN 61439-2          | CEI EN 61439-2          |
| Release Coil                    | (Vac)                             | 230                     | 230                     |

- Up to 4 DC inputs from the Photovoltaic field
- Up to 2 DC outputs to the Photovoltaic inverter
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 or 2 MPPT management
- DC surge protective device
- Suitable for 600V or 1000V systems
- With fuse holders mounted on positive and negative circuits
- With 230Vac release coil
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY



| VERSION                         | CODE TYPE                         | ISA0402CA06             | ISA0402CA10             |
|---------------------------------|-----------------------------------|-------------------------|-------------------------|
| <b>DC CIRCUIT</b>               |                                   |                         |                         |
| Number of Input (solar strings) |                                   | 4                       | 4                       |
| Number of Outputs MPPT          |                                   | 2                       | 2                       |
| Max. Input Voltage              | (V)                               | 600                     | 1000                    |
| Max. Current for each string    | (A)                               | 12.5                    | 12.5                    |
| Max. MPPT output current        | (A)                               | 25                      | 25                      |
| With fuse holder                |                                   | No                      | No                      |
| Circuit breaker                 |                                   | 2                       | 2                       |
| Surge protective device         | Nominal voltage Un                | (V) 600                 | 1000                    |
|                                 | Protection level Up               | (V) 2000                | 3000                    |
|                                 | Nominal discharge current 8/20 In | (kA) 20                 | 20                      |
| Input connection                |                                   | Cabur Line 4 connectors | Cabur Line 4 connectors |
| Output connection               |                                   | Cabur Line 4 connectors | Cabur Line 4 connectors |
| <b>GENERAL DATA</b>             |                                   |                         |                         |
| Protection Degree               |                                   | IP65                    | IP65                    |
| Size (including connectors)     | (mm)                              | 295x495x130             | 295x495x130             |
| Standard compliancy             |                                   | CEI EN 61439-2          | CEI EN 61439-2          |
| Release Coil                    | (Vac)                             | 230                     | 230                     |

- Up to 8 DC inputs from the Photovoltaic field
- Up to 1 DC outputs to the Photovoltaic inverter
- DC inputs/outputs based on Cabur Line 4 connectors
- 1 MPPT management
- DC surge protective device
- Suitable for 1000V systems
- With fuse holders mounted on positive and negative circuits
- With 230Vac release coil
- CEI EN 61439-2 compliant

PRESENTATION PURPOSE ONLY



[1] Our stringbox are sell without fuses, the choice of the correct size of fuse is mandatory by the customers.

| VERSION                         | CODE TYPE                         | ISA0801CA10                       | ISA0801CA10 |
|---------------------------------|-----------------------------------|-----------------------------------|-------------|
| <b>DC CIRCUIT</b>               |                                   |                                   |             |
| Number of Input (solar strings) |                                   | 8                                 |             |
| Number of Outputs MPPT          |                                   | 1                                 |             |
| Max. Input Voltage              | (V)                               | 1000                              |             |
| Max. Current for each string    | (A)                               | 10                                |             |
| Max. MPPT output current        | (A)                               | 80                                |             |
| With fuse holder                |                                   | Yes (1)                           |             |
| Circuit breaker                 |                                   | 1                                 |             |
| Surge protective device         | Nominal voltage Un                | (V)                               | 1000        |
|                                 | Protection level Up               | (V)                               | 3000        |
|                                 | Nominal discharge current 8/20 In | (kA)                              | 20          |
| Input connection                |                                   | Cabur Line 4 connectors           |             |
| Output connection               |                                   | 35 mm <sup>2</sup> terminal block |             |
| <b>GENERAL DATA</b>             |                                   |                                   |             |
| Protection Degree               |                                   | IP65                              |             |
| Size (including connectors)     | (mm)                              | 504x434x210                       |             |
| Standard compliancy             |                                   | CEI EN 61439-2                    |             |
| Release Coil                    | (Vac)                             | 230                               |             |



The new ISM photovoltaic panel series are suitable for monitoring the energy production of the plant in every single moment.

Thanks to the transducers is possible to monitor the string currents and the overall voltage.

Inside the panel the **XCIO4** analogue converters allow to acquire the signals and information from the strings and to put them on the Modbus line.

To setup the system connection it is necessary to use the following Modbus addresses.

Default Modbus addresses:

- **XCIO4IMB-1**: STRINGS CURRENT 1-4 ID MODBUS 1
- **XCIO4IMB-2**: STRINGS CURRENT 5-8 ID MODBUS 2
- **XCIO4VMB**: PARALLEL VOLTAGE ID MODBUS 3

| DEVICE            | MODBUS ADDRESSES | MODBUS FUNCTION (*) | REGISTER | DESCRIPTION      |
|-------------------|------------------|---------------------|----------|------------------|
| <b>XCIO4IMB-1</b> | 01               | 04                  | 07       | String Current 1 |
|                   | 01               | 04                  | 08       | String Current 2 |
|                   | 01               | 04                  | 09       | String Current 3 |
|                   | 01               | 04                  | 10       | String Current 4 |
| <b>XCIO4IMB-2</b> | 02               | 04                  | 07       | String Current 5 |
|                   | 02               | 04                  | 08       | String Current 6 |
|                   | 02               | 04                  | 09       | String Current 7 |
|                   | 02               | 04                  | 10       | String Current 8 |
| <b>XCIO4VMB</b>   | 03               | 04                  | 07       | Parallel Voltage |

If the plant has more than one ISM panel, it will be necessary to increment the Modbus addresses of the additional devices, to avoid read conflicts (i.e. if we have a second ISM0801CA10:

ID MODBUS 3+1, ID MODBUS 3 + 2, ID MODBUS 3 + 3).

The devices setup can be performed with CaburLab free software, for more information please contact our technical office.

(\*) Readings can also be performed with function 03, for more information please contact our technical office.



- Up to 16 DC inputs from the Photovoltaic field
- 1 DC outputs to the Photovoltaic inverter
- DC inputs based on Cabur Line 4 connectors
- 1 MPPT management
- Suitable for 1000V systems
- With 230 Vac release coil
- With current and voltage strings monitoring
- Modbus RTU communication
- With fuse holders on positive and negative circuits
- CEI EN 61439-2 compliant

(1) Our stringbox are sell without fuses, the choice of the correct size of fuse is mandatory by the customers.

PRESENTATION PURPOSE ONLY



PRESENTATION PURPOSE ONLY




| VERSION                         | CODE TYPE                         | ISM0801CA10             | ISM1601CA10             |
|---------------------------------|-----------------------------------|-------------------------|-------------------------|
| <b>DC CIRCUIT</b>               |                                   |                         |                         |
| Number of Input (solar strings) |                                   | 8                       | 16                      |
| Number of Outputs MPPT          |                                   | 1                       | 1                       |
| Max. Input Voltage              | (V)                               | 1000                    | 1000                    |
| Max. Current for each string    | (A)                               | 10                      | 10                      |
| Max. MPPT output current        | (A)                               | 80                      | 160                     |
| With fuse holder                |                                   | Yes (1)                 | Yes (1)                 |
| Circuit breaker                 |                                   | 1                       | 1                       |
| Surge protective device         | Nominal voltage Un                | (V)                     | 1000                    |
|                                 | Protection level Up               | (V)                     | 3000                    |
|                                 | Nominal discharge current 8/20 In | (kA)                    | 20                      |
| Input connection                |                                   | Cabur Line 4 connectors | Cabur Line 4 connectors |
| Output connection               |                                   | 35mmq Terminal blocks   | 70mmq Terminal blocks   |
| <b>GENERAL DATA</b>             |                                   |                         |                         |
| Protection Degree               |                                   | IP65                    | IP65                    |
| Size (including connectors)     | (mm)                              | 210x434x660             | 355x810x1056            |
| Standard compliancy             |                                   | CEI EN 61439-2          | CEI EN 61439-2          |
| Release Coil                    | (Vac)                             | -                       | 230                     |
| Data communication protocol     |                                   | Modbus RTU              | Modbus RTU              |

The ISM control panels have an RS485 communication port, on which the modbus rtu protocol is mapped. It allows the communication with a remote device like PC or PLC. The physically connection between the control panels and PC should be done with twisted shielded cable in order to reduce the noise and electromagnetic interference. It is advisable to connect the devices in input and output mode rather than making branched connections.

Never use the star connection. The modbus address of each device can be configured using CaburLab software, which can be downloaded for free from our website.


## CONNECTION TYPES WITH RS485 TWISTED PAIR

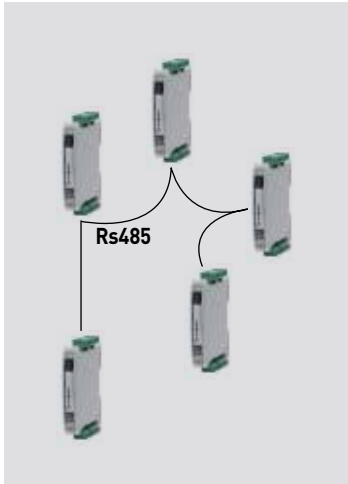

EXCELLENT



NO

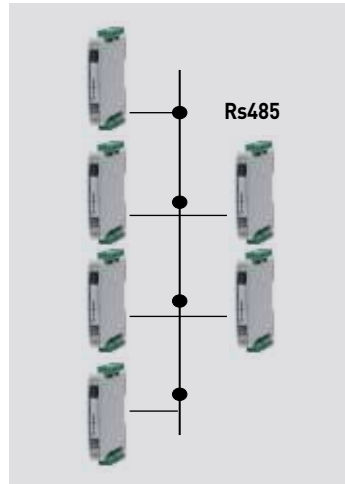

NOT RECOMMENDED

## CIO4 GENERAL FEATURE

### MODBUS-RTU PROGRAMMABLE ANALOG CONVERTERS

The XCIO4 devices are analog converters, fully programmable through a PC application and with ModBus communication interface.

There are four different models:

- XCIO4VMB voltage converter
- XCIO4IMB current converter
- XCIO4RMB thermoresistance and potentiometer converter
- XCIO4TMB thermocouple converter
- XCIO4RLYMB, actuation module

Each device has up to four independent channels, it is remotely configurable through the ModBus interface and in alternative with a uUSB port with no need for additional power supply.


The devices are fully programmable by means of CaburLab software application or directly accessing the ModBus registers by means of a PLC.

The XCIO4RLYMB can be configured to have a default safe condition called safestate that allows to set the state of the output when the power is off and/or when the device is remotely controlled.

### XCIO4VMB / XCIO4IMB

Inside the ISM0801CA10 there are 2 XCIO4IMB that allow the acquisition and monitoring of the photovoltaic current strings and one XCIO4VMB that acquire the parallel voltage of the photovoltaic strings.

| General data                      | xCIO4IMB             | XCIO4VMB            |
|-----------------------------------|----------------------|---------------------|
| Input range                       | ± 20 mA programmable | ± 10 V programmable |
| Maximum voltage/current signal IN | 24mA                 | 12V                 |
| Parametrization IN                | Software CaburLab    | Software CaburLab   |
| Power supply voltage              | 24Vdc ( 8...30Vdc)   | 24Vdc ( 8...30Vdc)  |
| Dimensions                        | 101x79x17.5 mm       | 101x79x17.5 mm      |
| Operation temperature range       | -20...+70°C          | -20...+70°C         |

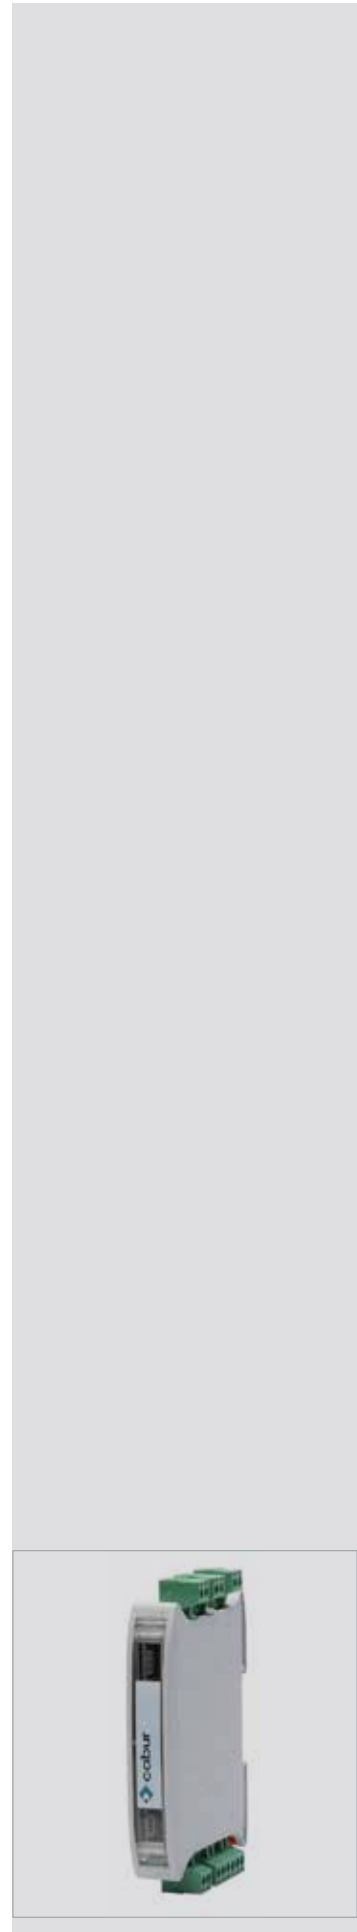

## ISM STRINGBOX GENERAL CHARACTERISTICS

### SINGLE-PHASE SWITCHING POWER SUPPLY SERIES DOMOTIC POWER (CODE XCSD30F)

The single-phase switching power supply for DIN rail with 30W power, ideal for applications in civil and industrial automation. Standard modular DIN measurements for installations in control units. High output and a contained operating temperature to promote energy savings and longer component life.

Main characteristics:

- Small size
- Use on all power supply networks
- Insulation class II
- Thermal protection
- IP20 protection degree against accidental contact according to IEC529
- Reduced time and cost for installation in remote panels and surveillance and monitoring systems (an earth connection is required)
- Quantity per pack: 1

### MEASUREMENT CURRENTS DEVICE (CODE ISPAMP4)

In the ISM0801CA10 there are 2 modules with magnetic Hall sensors for reading the string current.

The measurement is possible thanks to the Hall effect which allows non-invasive work to be carried out in the power circuit by keeping a very high galvanic insulation.

Characteristics:

- Accuracy of the measurement
- 3KV of insulation
- Fast response to transistors
- Quantity per pack: 1

| General data               | Value            |
|----------------------------|------------------|
| Nominal current            | 25 A             |
| Conversion ratio           | 1,000: 1         |
| Power supply               | 15V - 15V + - 5% |
| Electricity consumption    | 16 mA            |
| Minimum resistance of load | 150 Ohm          |
| Operating temperature      | -10 °C ÷ +70 °C  |
| Storage temperature        | -25 °C ÷ +85 °C  |
| Linearity                  | 1% full scale    |
| Limit of linearity         | +55 A            |
| Accuracy                   | 5 % full scale   |
| Band width                 | DC - 200 kHz     |
| Quantity per pack          | 1                |

### MEASUREMENT STRING VOLTAGE DEVICE (CODE ISPVLT1)

In the ISM series there is a unit for reading the string voltage. The measurement is possible thanks to the Hall effect which allows non-invasive work to be carried out in the power circuit by keeping a very high galvanic

insulation.

The ISPVLT1 module permits a measurement of the voltage by maintaining a galvanic separation between the primary and the secondary circuit.

| General data                           | Value        |
|--|--------------|
| Primary current                        | 10 mA        |
| Primary current - field of measurement | 0 .. ± 14 mA |
| Conversion ratio                       | 2,500: 1,000 |
| Power supply                           | ± 12 .. 15 V |
| Electricity consumption                | 25 mA        |
| Insulation voltage                     | 2.5 kV       |
| Quantity per pack                      | 1            |



15 horizontal grey bars for notes.

# Surge Protection Devices

Components for protection of DC and AC circuits.



Surge protection devices (SPD) prevent sudden electrical surges induced to the PV array by the earthed network and conducted to the AC power supply network or signal line from damaging the electronic equipment.

The surge protection device Cabur products are composed by varistor and gas cartridge for the AC protection, and Y configuration at 600VDC and 1000VDC for DC protections.

### Where and how SPDs should be used

In the case of transitory power surges, the only way to protect equipment is to limit the difference in voltage between the various conductors that exit/enter the device. For this reason, in PV systems the surge protection must always be installed on both the AC and DC sides, so as to guarantee equal voltage between all the various system conductors, both in the case that the surge arrives from the PV array or from the AC or earthed network.

In the case of a power surge on the PV array, the DC side SPDs create an instantaneous short-circuit between the positive, negative, and earthed conductors, establishing a transitory voltage equilibrium. Hence the three conductors on the DC side of the inverter rise to thousands of V, but as the SPDs limit the difference in voltage between the three conductors to 4kV, no malfunctions will occur on the DC side of the inverter, which will have a resistance to impulse power surges greater than 4kV.

Alone, however, this is insufficient to protect the inverter from malfunctioning, because if the three conductors on the DC side rise to 10kV and on the AC side there are no SPDs able to create transitory voltage equilibrium with the DC side, then the DC side at 10kV will "see" the 230-400 AC exiting from the inverter as a lower voltage to which it can discharge through the insulation and/or components of the inverter, destroying them. Similarly, the same thing would occur if the power surge occurred on the AC side. The concept of equal voltage requires the use of SPDs on all conductors that exit and enter the inverter, because only by limiting the difference in voltage between the AC and DC sides and the earthing, that is to say within the surge levels that the device is able to support, can destructive surges to the insulations or components be avoided.

### Safe use of SPDs up to 1,000 VDC

The varistor, the active element of the SPD, is a component that is able to support a limited number

of discharges. It can still short circuit if subjected to a discharge that exceeds its max I<sub>sc</sub>, or if it is subjected to multiple discharges below its max I<sub>sc</sub>, gradually deteriorating its performance. Under these conditions, its resistance, which normally is in tens of MΩ, will decrease to a few hundreds/tens of Ω, the varistor will overheat due to the passage of current between the line and the earthing, and it can catch fire.

Regulations regarding Test Class II SPDs requires them to be provided with a device which disconnects them from the line at the end of their useful life. The device consists of a contact in series on the side of the line which has its ends welded airtight, one of which is spring-loaded. When the overheated varistor exceeds the fusion temperature of the seal, the spring-loaded conductor disconnects, opening the contact and disconnecting the varistor from the line, thereby preventing damage. In modern SPDs, created for us on AC lines, in which the disconnection device is able to eliminate the arc, during the pass to zero of the AC current, consequent to the opening of the broken varistor through which the short L/earthing current passes. In PV systems the varying conditions make the automatic disconnection task of the SPDs more difficult. DC voltages from 500 to 1,000 V and no pass to zero for the voltage/current makes interruption of the arc between the contacts at entry more difficult, because the air and surface distances designed for AC are not sufficient to guarantee disconnection power for the arc in DC. The problem is solved by using three varistors set up in a "Y" formation. With the Y set up, the discharge is divided into three varistors instead of the two found in the classic formation. This makes it much less likely that one of them will malfunction. Nevertheless, in the case of a shortcircuit in one of the varistors, in the circuit between the Line and the earthing, once the surge has passed, the second intact varistor returns to the resistance MΩ, cutting off the current to the contact on the malfunctioning varistor.

Cabur does not recommend the use of earthed gas discharge devices on the DC side, because while they are able to ensure insulation in terms of earthing, in the case of a short or semishort circuit to a varistor, the gas discharge device would not be set off by the DC voltage, meaning that the string I<sub>sc</sub> would pass through the varistor, and it could catch fire.


- For single phase and three phase systems

[1] the fuses is not mandatory on all plants, if it's necessary choose one that match correctly with the system



| VERSION | CODE TYPE | ISPD275AC1P | ISPD440AC1P | ISPD255ACNPE |
|---------|-----------|-------------|-------------|--------------|
|---------|-----------|-------------|-------------|--------------|

SCHEME



| TECHNICAL DATA                             |                  |                    |                   |                   |
|--|------------------|--------------------|-------------------|-------------------|
| Test Class                                 |                  |                    | II                | II                |
| Type of Network                            |                  |                    | TN, IT, TT        | TN, IT, TT        |
| Nominal voltage                            | Un               | [V]                | 220 - 230         | 230 - 400         |
| Max. continuous voltage                    | Uc               | [V]                | 275               | 440               |
| Working frequency                          |                  | [Hz]               | 50 - 60           | 50 - 60           |
| Max. Discharge current (8/20µs)            | I <sub>max</sub> | [kA]               | 60                | 60                |
| Nominal discharge current (8/20µs)         | I <sub>n</sub>   | [kA]               | 30                | 30                |
| Voltage protection level at I <sub>n</sub> | U <sub>p</sub>   | [kV]               | 1.5               | 2.2               |
| Protection mode                            |                  |                    | L/N-PE            | L/N-PE            |
| Isolation resistance                       | R <sub>iso</sub> | [MΩ]               | > 10 <sup>2</sup> | > 10 <sup>2</sup> |
| Response time                              |                  | [ns]               | ≤ 25              | ≤ 25              |
| Recommended back-up fuse                   |                  | [A]                | 125 (1)           | 125 (1)           |
| Max. cables section                        |                  | [mm <sup>2</sup> ] | 25                | 25                |
| Mounting                                   |                  | DIN rail TH35      | Yes               | Yes               |
| Working temperature                        |                  | [°C]               | -40...+85         | -40...+85         |
| Protection degree                          |                  |                    | IP20              | IP20              |
| Housing material                           |                  |                    | PPO               | PPO               |
| Inflammability class                       |                  |                    | UL94-V0           | UL94-V0           |
| Fault indicator                            | Green            |                    | OK                | OK                |
|  | Red              |                    | Fail              | Fail              |
| Remote control contact                     |                  |                    | -                 | -                 |
| Sizes (LxHxP)                              |                  |                    | 18x90x66          | 18x90x66          |
| Pack quantity                              |                  | pieces             | 1                 | 1                 |

| APPROVALS |  | CE | CE | CE |
|-----------|--|----|----|----|
|-----------|--|----|----|----|

| ACCESSORIES     |         |  |         |         |
|-----------------|---------|--|---------|---------|
| Parallel bridge | 2 poles |  | 9000582 | 9000582 |
|                 | 3 poles |  | 9000583 | 9000583 |
|                 | 4 poles |  | 9000584 | 9000584 |

SURGE PROTECTION DEVICES



- For single phase and three phase systems
- Phase and neutral connection in one cartridge
- Compact sizes

(1) the fuses is not mandatory on all plants, if it's necessary choose one that match correctly with the system



| VERSION | CODE TYPE | ISPD275AC1PNPE | ISPD440AC3PNPE |
|---------|-----------|----------------|----------------|
|---------|-----------|----------------|----------------|

SCHEME



| TECHNICAL DATA                             |                  |                    | ISPD275AC1PNPE    | ISPD440AC3PNPE          |
|--|------------------|--------------------|-------------------|-------------------------|
| Test Class                                 |                  |                    | II                | II                      |
| Type of Network                            |                  |                    | TN, IT, TT        | TN, IT, TT              |
| Nominal voltage                            | Un               | [V]                | 220 - 230         | 230 - 400               |
| Max. continuous voltage                    | Uc               | [V]                | 275               | 440                     |
| Working frequency                          |                  | [Hz]               | 50 - 60           | 50 - 60                 |
| Max. Discharge current (8/20µs)            | I <sub>max</sub> | [kA]               | 40                | 40                      |
| Nominal discharge current (8/20µs)         | I <sub>n</sub>   | [kA]               | 20                | 20                      |
| Voltage protection level at I <sub>n</sub> | U <sub>p</sub>   | [kV]               | 1.5               | 1.5                     |
| Protection mode                            |                  |                    | L - N / N - PE    | L1, L2, L3 - N / N - PE |
| Isolation resistance                       | R <sub>iso</sub> | [MΩ]               | > 10 <sup>2</sup> | > 10 <sup>2</sup>       |
| Response time                              |                  | [ns]               | ≤ 25              | ≤ 25                    |
| Recommended back-up fuse                   |                  | [A]                | 125 (1)           | 125 (1)                 |
| Max. cables section                        |                  | [mm <sup>2</sup> ] | 25                | 25                      |
| Mounting                                   | DIN rail TH35    |                    | Yes               | Yes                     |
| Working temperature                        |                  | [°C]               | -40...+85         | -40...+85               |
| Protection degree                          |                  |                    | IP20              | IP20                    |
| Housing material                           |                  |                    | PPO               | PPO                     |
| Inflammability class                       |                  |                    | UL94-V0           | UL94-V0                 |
| Fault indicator                            | Green            |                    | -                 | -                       |
|  | Red              |                    | Fail              | Fail                    |
| Remote control contact                     |                  |                    | -                 | -                       |
| Sizes (LxHxP)                              |                  |                    | 18x90x66          | 36x90x68                |
| Pack quantity                              |                  | pieces             | 1                 | 1                       |

APPROVALS



| ACCESSORIES     |         |  | ISPD275AC1PNPE | ISPD440AC3PNPE |
|-----------------|---------|--|----------------|----------------|
| Parallel bridge | 2 poles |  | -              | -              |
|                 | 3 poles |  | -              | -              |
|                 | 4 poles |  | -              | -              |





- For 600V or 1000V systems

[1] the fuses is not mandatory on all plants, if it's necessary choose one that match correctly with the system



| VERSION | CODE TYPE | ISPD600DC3P | ISPD1000DC3P |
|---------|-----------|-------------|--------------|
|---------|-----------|-------------|--------------|

SCHEME



| TECHNICAL DATA                             |                  |                    | ISPD600DC3P       | ISPD1000DC3P      |
|--|------------------|--------------------|-------------------|-------------------|
| Test Class                                 |                  |                    | II                | II                |
| Type of Network                            |                  |                    | -                 | -                 |
| Nominal voltage                            | Un               | [V]                | 600               | 1000              |
| Max. continuous voltage                    | Uc               | [V]                | 670               | 1060              |
| Working frequency                          |                  | [Hz]               | -                 | -                 |
| Max. Discharge current (8/20µs)            | I <sub>max</sub> | [kA]               | 40                | 40                |
| Nominal discharge current (8/20µs)         | I <sub>n</sub>   | [kA]               | 20                | 20                |
| Voltage protection level at I <sub>n</sub> | U <sub>p</sub>   | [kV]               | 2.4               | 3.6               |
| Protection mode                            |                  |                    | -                 | -                 |
| Isolation resistance                       | R <sub>iso</sub> | [MΩ]               | > 10 <sup>2</sup> | > 10 <sup>2</sup> |
| Response time                              |                  | [ns]               | ≤ 25              | ≤ 25              |
| Recommended back-up fuse                   |                  | [A]                | 125 (1)           | 125 (1)           |
| Max. cables section                        |                  | [mm <sup>2</sup> ] | 25                | 25                |
| Mounting                                   | DIN rail TH35    |                    | Yes               | Yes               |
| Working temperature                        |                  | [°C]               | -40...+85         | -40...+85         |
| Protection degree                          |                  |                    | IP20              | IP20              |
| Housing material                           |                  |                    | PPO               | PPO               |
| Inflammability class                       |                  |                    | UL94-V0           | UL94-V0           |
| Fault indicator                            | Green            |                    | OK                | OK                |
|  | Red              |                    | Fail              | Fail              |
| Remote control contact                     |                  |                    | -                 | -                 |
| Sizes (LxHxP)                              |                  |                    | 36x90x68          | 36x90x68          |
| Pack quantity                              |                  | pieces             | 1                 | 1                 |

APPROVALS



ACCESSORIES

|                 |         |   |   |
|-----------------|---------|---|---|
| Parallel bridge | 2 poles | - | - |
|                 | 3 poles | - | - |
|                 | 4 poles | - | - |

Blank lined area for notes.

# Accessories

**Mounting on DIN rail**  
**Designed for block the reverse current on the photovoltaic strings**

Pay attention to the dissipation of the diode, before configure your system consider all dissipation of components and the dissipation of your panel



| VERSION                                 | CODE TYPE | ISDS3516      | ISDS102       | 9000395        |
|---|-----------|---------------|---------------|----------------|
|   |           | KXDS3516      | KXDS102       | T20HF220       |
| SCHEME                                  |           |               |               |                |
| Insulation voltage towards the DIN rail | (kVac)    | 3             | 3             | 5              |
| Max. string voltage                     | (Vdc)     | 800           | 1000          | 1100           |
| Max. continuous current at 25°C         | (A)       | 10            | 10            | 12             |
| Dissipated power at 10A                 | (W)       | 8             | 16            | -              |
| Dissipated power at 7.5A                | (W)       | -             | -             | 10             |
| Dissipated power at 17A                 | (W)       | -             | -             | 20             |
| Mounting                                |           | DIN rail TH35 | DIN rail TH35 | On metal plate |
| Connections                             |           | 6.3 faston    | 6.3 faston    | Wire terminals |
| Size (LxHxP)                            | (mm)      | 24x77x80      | 24x77x80      | 24x41x25       |
| Weight                                  | (g)       | 235           | 235           | 54             |
| Pack quantity                           | pieces    | 10            | 10            | 10             |
| Approvals                               |           | CE            | CE            | CE             |

## PREASSEMBLED CABLE

Cabur manufactures pre-wired cables with photovoltaic connectors on request. Cables from 4 to 10 mm<sup>2</sup> are available in red or black. For more information contact our sales department.

Nominal voltage: 750 Vac - 1000 Vdc  
 Interruption power 100 kA



| VERSION             | CODE TYPE | 9000401 | 9000402 | 9000403 | 9000404 | 9000405 | 9000406 | 9000407 |
|---------------------|-----------|---------|---------|---------|---------|---------|---------|---------|
|                     |           | DCT1-2  | DCT2-2  | DCT3-2  | DCT4-2  | DCT5-2  | DCT6-2  | DCT7-2  |
| Nominal current (A) |           | 1       | 2       | 3       | 4       | 5       | 6       | 7       |
| Q.ty / package      |           | 10      | 10      | 10      | 10      | 10      | 10      | 10      |
| Approvals           |           | CE      | CE      | CE      | CE      | CE      | CE      | CE      |




| VERSION             | CODE TYPE | 9000408 | 9000409 | 9000410 | 9000411 | 9000412 | 9000413 | 9000414 |
|---------------------|-----------|---------|---------|---------|---------|---------|---------|---------|
|                     |           | DCT8-2  | DCT10-2 | DCT12-2 | DCT15-2 | DCT20-2 | DCT25-2 | DCT30-2 |
| Nominal current (A) |           | 8       | 10      | 12      | 15      | 20      | 25      | 30      |
| Q.ty / package      |           | 10      | 10      | 10      | 10      | 10      | 10      | 10      |
| Approvals           |           | CE      | CE      | CE      | CE      | CE      | CE      | CE      |

Ideal solution for use inside photovoltaic plants  
 Fuseholders for gPV cylindrical fuses  
 Suitable for 1000V systems



| VERSION | CODE TYPE | 9000446 |
|---------|-----------|---------|
|---------|-----------|---------|

SCHEME



|  |                    |               |
|--|--------------------|---------------|
| N poles  |                    | 1             |
| Rated current                                  | (A)                | 20            |
| Rated voltage                                  | (V)                | 1000          |
| Maximum cable section                          | (mm <sup>2</sup> ) | 10            |
| Maximum power dissipation of the inserted fuse | (W)                | 3             |
| Maximum operating temperature                  | (°C)               | 80            |
| Mounting                                       |                    | DIN rail TH35 |
| Q.ty / package                                 |                    | 12            |

Approvals

## INDEX BY TYPE

|             |    |                |    |                |    |                |    |
|-------------|----|----------------|----|----------------|----|----------------|----|
| 9000446     | 57 | ISB0201CA10    | 38 | ISL22MSNC03256 | 25 | ISPD440AC3PNPE | 52 |
| DCT1-2      | 57 | ISB0202CA10    | 39 | ISL22MSSC03251 | 26 | ISPD600DC3P    | 53 |
| DCT2-2      | 57 | ISB0401CA06    | 39 | ISL22MSSC03321 | 26 | ISPD1000DC3P   | 53 |
| DCT3-2      | 57 | ISB0401CA10    | 39 | ISL22TSNC03201 | 34 | ISS00MNNA03160 | 37 |
| DCT4-2      | 57 | ISB0402CA06    | 40 | ISL0101CA06    | 21 | ISS00MNNA03320 | 37 |
| DCT5-2      | 57 | ISB0402CA10    | 40 | ISL0101CA10    | 21 | KX04FMHN       | 12 |
| DCT6-2      | 57 | ISL02T01CA06   | 32 | ISL0101MT06    | 27 | KX04FMMN       | 11 |
| DCT7-2      | 57 | ISL02T01CA10   | 32 | ISL0101NS06    | 28 | KX04MFFN       | 11 |
| DCT8-2      | 57 | ISL02T01NS10   | 36 | ISL0101NSMT06  | 31 | KX04PF4060N    | 8  |
| DCT10-2     | 57 | ISL02T02CA06   | 33 | ISL0201CA06    | 22 | KX04PM4060N    | 8  |
| DCT12-2     | 57 | ISL02T02CA10   | 33 | ISL0201CA10    | 22 | KX04VF100N     | 10 |
| DCT15-2     | 57 | ISL02T02CX06   | 34 | ISL0202CA06    | 23 | KX04VF4060N    | 9  |
| DCT20-2     | 57 | ISL02T02NS06   | 36 | ISL0202CA10    | 23 | KX04VM100N     | 10 |
| DCT25-2     | 57 | ISL11MNNA03161 | 28 | ISL0202CX06    | 24 | KX04VM4060N    | 9  |
| DCT30-2     | 57 | ISL11MNNC03206 | 29 | ISL0202MT06    | 27 | KXCRI10        | 13 |
| IS3170      | 13 | ISL11MNNC03256 | 29 | ISL0202NS06    | 30 | KXCRI10N       | 13 |
| ISA0201CA06 | 41 | ISL11MSNA03251 | 24 | ISL0202NSMT06  | 31 | KXCRI2506N     | 13 |
| ISA0201CA10 | 41 | ISL11MSNC03206 | 25 | ISM0801CA10    | 45 | KXCSSLPE       | 13 |
| ISA0402CA06 | 42 | ISL11MSSC03206 | 26 | ISM1601CA10    | 45 | KXDS102        | 56 |
| ISA0402CA10 | 42 | ISL11TNNC03201 | 35 | ISPD255ACNPE   | 51 | KXDS3516       | 56 |
| ISA0801CA10 | 43 | ISL21MNNA03321 | 30 | ISPD275AC1P    | 51 | T20HF220       | 56 |
| ISB0101CA10 | 38 | ISL21TNNC03101 | 35 | ISPD275AC1PNPE | 52 | UMCT           | 13 |
| ISB0201CA06 | 38 | ISL21TSNC03101 | 34 | ISPD440AC1P    | 51 |                |    |

## INDEX BY CODE

|          |    |              |    |                |    |                |    |
|----------|----|--------------|----|----------------|----|----------------|----|
| 9000395  | 56 | IS24111N     | 8  | ISL02T01CA10   | 32 | ISL0101NS06    | 28 |
| 9000401  | 57 | IS24241N     | 9  | ISL02T01NS10   | 36 | ISL0101NSMT06  | 31 |
| 9000402  | 57 | IS24243N     | 10 | ISL02T02CA06   | 33 | ISL0201CA06    | 22 |
| 9000403  | 57 | IS41410N     | 11 | ISL02T02CA10   | 33 | ISL0201CA10    | 22 |
| 9000404  | 57 | IS42420N     | 11 | ISL02T02CX06   | 34 | ISL0202CA06    | 23 |
| 9000405  | 57 | IS43430N     | 12 | ISL02T02NS06   | 36 | ISL0202CA10    | 23 |
| 9000406  | 57 | IS31579002   | 13 | ISL11MNNA03161 | 28 | ISL0202CX06    | 24 |
| 9000407  | 57 | ISA0201CA06  | 41 | ISL11MNNC03206 | 29 | ISL0202MT06    | 27 |
| 9000408  | 57 | ISA0201CA10  | 41 | ISL11MNNC03256 | 29 | ISL0202NS06    | 30 |
| 9000409  | 57 | ISA0402CA06  | 42 | ISL11MSNA03251 | 24 | ISL0202NSMT06  | 31 |
| 9000410  | 57 | ISA0402CA10  | 42 | ISL11MSNC03206 | 25 | ISM0801CA10    | 45 |
| 9000411  | 57 | ISA0801CA10  | 43 | ISL11MSSC03206 | 26 | ISM1601CA10    | 45 |
| 9000412  | 57 | ISB0101CA10  | 38 | ISL11TNNC03201 | 35 | ISPD255ACNPE   | 51 |
| 9000413  | 57 | ISB0201CA06  | 38 | ISL21MNNA03321 | 30 | ISPD275AC1P    | 51 |
| 9000414  | 57 | ISB0201CA10  | 38 | ISL21TNNC03101 | 35 | ISPD275AC1PNPE | 52 |
| 9000446  | 57 | ISB0202CA10  | 39 | ISL21TSNC03101 | 34 | ISPD440AC1P    | 51 |
| IS3110   | 13 | ISB0401CA06  | 39 | ISL22MSNC03256 | 25 | ISPD440AC3PNPE | 52 |
| IS3110N  | 13 | ISB0401CA10  | 39 | ISL22MSSC03251 | 26 | ISPD600DC3P    | 53 |
| IS3161N  | 13 | ISB0402CA06  | 40 | ISL22MSSC03321 | 26 | ISPD1000DC3P   | 53 |
| IS3170   | 13 | ISB0402CA10  | 40 | ISL22TSNC03201 | 34 | ISS00MNNA03160 | 37 |
| IS14110N | 8  | ISDS102      | 56 | ISL0101CA06    | 21 | ISS00MNNA03320 | 37 |
| IS14240N | 9  | ISDS3516     | 56 | ISL0101CA10    | 21 | UMCT3149       | 13 |
| IS14242N | 10 | ISL02T01CA06 | 32 | ISL0101MT06    | 27 |                |    |





AUTOMATION  
AND CONTROL  
SOLUTIONS



INDUSTRIAL  
CONNECTIVITY  
SOLUTIONS



SOLUTIONS  
FOR RENEWABLE  
TRANSITION



INDUSTRIAL  
MARKING  
SOLUTIONS



D031G22A  
03/2022

### **Cabur Srl**

#### **Headquarters (Italia)**

17041 - Altare (SV)  
Località Isola Grande, 45  
T. +39 019 58999.1  
F. +39 019 58999233  
[www.cabur.it](http://www.cabur.it)  
[info@cabur.it](mailto:info@cabur.it)

### **Cabur Romania Srl**

#### **Romanian Branch**

Strada Calea Plevnei nr. 139  
Corp B camera 25,26 sector 6  
Bucaresti  
T. +40 (21)31.17.140  
F. +40 (21)31.17.140  
[www.cabur.eu](http://www.cabur.eu)  
[gabriel.buzaianu@cabur.eu](mailto:gabriel.buzaianu@cabur.eu)